

# CESSNA

MORE PEOPLE BUY AND  
FLY CESSNA AIRPLANES  
THAN ANY OTHER MAKE

## 1971

WORLD'S LARGEST PRO-  
DUCER OF GENERAL  
AVIATION AIRCRAFT  
SINCE 1956

# MODEL 182 AND SKYLANE



## OWNER'S MANUAL

# PERFORMANCE - SPECIFICATIONS

## Skylane \*

<b>GROSS WEIGHT:</b>		
Take-Off . . . . .	2950 lbs	2500 lbs
Landing . . . . .	2800 lbs	2500 lbs
<b>SPEED:</b>		
Top Speed at Sea Level . . . . .	168 mph	170 mph
Cruise, 75% Power at 6500 ft . . . . .	160 mph	162 mph
<b>RANGE:</b>		
Cruise, 75% Power at 6500 ft . . . . .	690 mi	695 mi
60 Gallons, No Reserve . . . . .	4.3 hrs	4.3 hrs
	160 mph	162 mph
Cruise, 75% Power at 6500 ft . . . . .	910 mi	925 mi
79 Gallons, No Reserve . . . . .	5.7 hrs	5.7 hrs
	160 mph	162 mph
Optimum Range at 10,000 ft . . . . .	885 mi	960 mi
60 Gallons, No Reserve . . . . .	7.7 hrs	7.7 hrs
	115 mph	125 mph
Optimum Range at 10,000 ft . . . . .	1160 mi	1260 mi
79 Gallons, No Reserve . . . . .	10.1 hrs	10.1 hrs
	115 mph	125 mph
<b>RATE OF CLIMB AT SEA LEVEL . . . . .</b>	890 fpm	1210 fpm
<b>SERVICE CEILING . . . . .</b>	17,700 ft	20,100 ft
<b>TAKE-OFF:</b>		
Ground Run . . . . .	705 ft	485 ft
Total Distance Over 50 Foot Obstacle . . . . .	1350 ft	955 ft
<b>LANDING:</b>		
Ground Roll . . . . .	590 ft	590 ft
Total Distance Over 50 Foot Obstacle . . . . .	1350 ft	1350 ft
<b>STALL SPEED:</b>		
Flaps Up, Power Off . . . . .	66 mph	61 mph
Flaps Down, Power Off . . . . .	57 mph	52 mph
<b>EMPTY WEIGHT (Approximate)</b>		
Skylane . . . . .	1640 lbs	1640 lbs
Model 182 . . . . .	1580 lbs	1580 lbs
<b>USEFUL LOAD</b>		
Skylane . . . . .	1310 lbs	860 lbs
Model 182 . . . . .	1370 lbs	920 lbs
<b>BAGGAGE</b>		
Forward Area "A" (Station 82 to 108) . . . . .	120 lbs	120 lbs
Aft Area "B" (Station 108 to 124) . . . . .	80 lbs	80 lbs
<b>WING LOADING: Pounds/Sq Foot . . . . .</b>	16.9	14.4
<b>POWER LOADING: Pounds/HP . . . . .</b>	12.8	10.9
<b>FUEL CAPACITY: Total</b>		
Standard Tanks . . . . .	65 gal.	65 gal.
Optional Long Range Tanks . . . . .	84 gal.	84 gal.
<b>OIL CAPACITY: Total . . . . .</b>	12 qts	12 qts
<b>PROPELLER: Constant Speed (Diameter) . . . . .</b>	82 inches	82 inches
<b>ENGINE: Continental Engine. . . . .</b>	O-470-R	O-470-R
230 rated BHP at 2600 RPM		

NOTE: Performance data is shown for the Skylane which is 2 to 3 mph faster than a standard-equipped Model 182 (without speed fairings). There is a corresponding difference in range, while all other performance figures are the same for the 182 as shown for the Skylane.

\* This manual covers operation of the Model 182/Skylane which is certificated as Model 182N under FAA Type Certificate No. 3A13.

## CONGRATULATIONS . . . . .

Welcome to the ranks of Cessna Owners! Your Cessna has been designed and constructed to give you the most in performance, economy, and comfort. It is our desire that you will find flying it, either for business or pleasure, a pleasant and profitable experience.

This Owner's Manual has been prepared as a guide to help you get the most pleasure and utility from your Model 182/Skylane. It contains information about your Cessna's equipment, operating procedures, and performance; and suggestions for its servicing and care. We urge you to read it from cover to cover, and to refer to it frequently.

Our interest in your flying pleasure has not ceased with your purchase of a Cessna. World-wide, the Cessna Dealer Organization backed by the Cessna Service Department stands ready to serve you. The following services are offered by most Cessna Dealers:

**FACTORY TRAINED PERSONNEL** to provide you with courteous expert service.



**FACTORY APPROVED SERVICE EQUIPMENT** to provide you with the most efficient and accurate workmanship possible.

**A STOCK OF GENUINE CESSNA SERVICE PARTS** on hand when you need them.

**THE LATEST AUTHORITATIVE INFORMATION FOR SERVICING CESSNA AIRPLANES**, since Cessna Dealers have all of the Service Manuals and Parts Catalogs, kept current by Service Letters and Service News Letters, published by Cessna Aircraft Company.

We urge all Cessna owners to use the Cessna Dealer Organization to the fullest.

A current Cessna Dealer Directory accompanies your new airplane. The Directory is revised frequently, and a current copy can be obtained from your Cessna Dealer. Make your Directory one of your cross-country flight planning aids; a warm welcome awaits you at every Cessna Dealer.


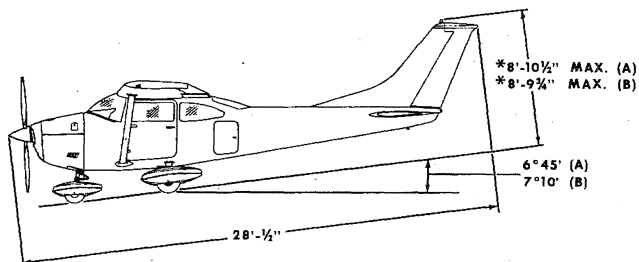


\*"A" designates maximum height of airplane with nose strut fully depressed, 5.00 X 5 nose gear tire, 6.00 X 6 main gear tires and an optional flashing beacon installed.

\*"B" designates maximum height of airplane with nose strut fully depressed, 6.00 X 6 nose gear tire, 8.00 X 6 main gear tires and an optional flashing beacon installed.

\*\* designates wing span with optional strobe lights.

## PRINCIPAL DIMENSIONS

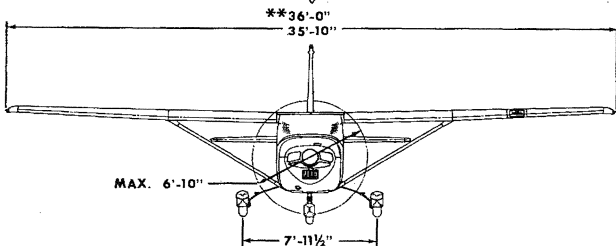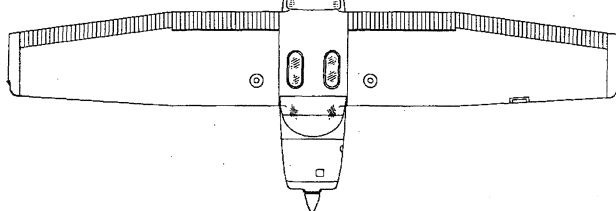



# TABLE OF CONTENTS

	Page =
SECTION I - OPERATING CHECK LIST .....	1-1
SECTION II - DESCRIPTION AND OPERATING DETAILS .....	2-1
SECTION III - EMERGENCY PROCEDURES .....	3-1
SECTION IV - OPERATING LIMITATIONS .....	4-1
SECTION V - CARE OF THE AIRPLANE .....	5-1
OWNER FOLLOW-UP SYSTEM .....	5-12
SECTION VI - OPERATIONAL DATA .....	6-1
SECTION VII- OPTIONAL SYSTEMS .....	7-1
ALPHABETICAL INDEX .....	Index-1

This manual describes the operation and performance of both the Cessna Model 182 and the Cessna Skylane. Equipment described as "Optional" denotes that the subject equipment is optional on the Model 182. Much of this equipment is standard on the Skylane model.



# *Section I*

## **OPERATING CHECK LIST**

One of the first steps in obtaining the utmost performance, service, and flying enjoyment from your Cessna is to familiarize yourself with your airplane's equipment, systems, and controls. This can best be done by reviewing this equipment while sitting in the airplane. Those items whose function and operation are not obvious are covered in Section II.

Section I lists, in Pilot's Check List form, the steps necessary to operate your airplane efficiently and safely. It is not a check list in its true form as it is considerably longer, but it does cover briefly all of the points that you should know for a typical flight.


The flight operational characteristics of your airplane are normal in all respects. There are no "unconventional" characteristics or operations that need to be mastered. All controls respond in the normal way within the entire range of operation. All airspeeds mentioned in Sections I, II, and III are indicated airspeeds. Corresponding calibrated airspeeds may be obtained from the Airspeed Correction Table in Section VI.

### **BEFORE ENTERING THE AIRPLANE.**

- (1) Make an exterior inspection in accordance with figure 1-1.

### **BEFORE STARTING THE ENGINE.**

- (1) Seats, Seat Belts and Shoulder Harnesses -- Adjust and lock.
- (2) Brakes -- Test and set.
- (3) Cowl Flaps -- "OPEN". (Move lever out of locking hole to reposition.)
- (4) Fuel Selector Valve Handle -- "BOTH".
- (5) Radios and Electrical Equipment -- "OFF".

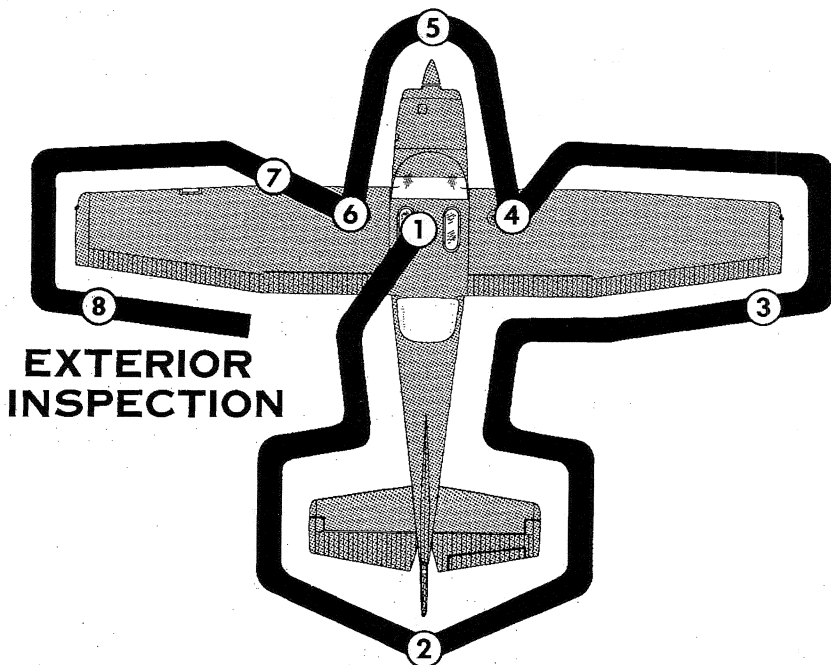

## EXTERIOR INSPECTION

### NOTE

Visually check aircraft for general condition during walk-around inspection. In cold weather, remove even small accumulations of frost, ice or snow from wing, tail and control surfaces. Also, make sure that control surfaces contain no internal accumulations of ice or debris. If night flight is planned, check operation of all lights, and make sure a flashlight is available.

- ① a. Remove control wheel lock.  
b. Check ignition switch "OFF."  
c. Turn on master switch and check fuel quantity indicators, then turn master switch "OFF."

Figure

- d. Check fuel selector valve handle on "BOTH."
  - e. Check baggage door for security. Lock with key if children are to occupy child's seat.
- ② a. Remove rudder gust lock, if installed.  
b. Disconnect tail tie-down.  
c. Check control surfaces for freedom of movement and security.
- ③ a. Check aileron for freedom of movement and security.
- ④ a. Disconnect wing tie-down.  
b. Check main wheel tire for proper inflation.  
c. Visually check fuel quantity, then check fuel filler cap secure.
- ⑤ a. Inspect flight instrument static source opening on side of fuselage for stoppage (both sides).  
b. Check propeller and spinner for nicks and security, and propeller for oil leaks.  
c. Check carburetor air filter for restrictions by dust or other foreign matter.  
d. Check nose wheel strut and tire for proper inflation.  
e. Disconnect tie-down rope.  
f. Check oil level. Do not operate with less than nine quarts. Fill to twelve quarts for extended flight.  
g. Before first flight of day and after each refueling, pull out strainer drain knob for about four seconds to clear fuel strainer of possible water and sediment. Check strainer drain closed. If water is observed, there is a possibility that the wing tank sumps contain water. Thus, the wing tank sump drain plugs and fuel selector valve drain plug should be removed to check for the presence of water.
- ⑥ a. Check main wheel tire for proper inflation.  
b. Visually check fuel quantity, then check fuel filler cap secure.
- ⑦ a. Check fuel tank vent opening for stoppage.  
b. Remove pitot tube cover, if installed and check pitot tube opening for stoppage.  
c. Disconnect wing tie-down.
- ⑧ a. Check aileron for freedom of movement and security.
- 1-1.

## STARTING ENGINE.

- (1) Mixture -- Rich.
- (2) Carburetor Heat -- Cold.
- (3) Propeller -- High RPM.
- (4) Throttle -- Opened approximately one-half inch.
- (5) Primer -- As required.
- (6) Master Switch -- "ON".
- (7) Ignition Switch -- "START". Hold until engine fires, but not longer than 30 seconds (release when engine starts).

### NOTE

If engine has been overprimed, start with throttle open 1/4 to 1/2 full open. Reduce throttle to idle when engine fires.

### NOTE

After starting, check for oil pressure indication within 30 seconds in normal temperatures and 60 seconds in cold temperatures. If no indication appears, shut off engine and investigate.

## BEFORE TAKE-OFF.

- (1) Parking Brake -- Set.
- (2) Cowl Flaps -- Check full "OPEN".
- (3) Flight Controls -- Check for free and correct movement.
- (4) Fuel Selector Valve Handle -- "BOTH".
- (5) Elevator and Rudder Trim -- "TAKE-OFF" setting.
- (6) Throttle Setting -- 1700 RPM.
- (7) Engine Instruments and Ammeter -- Check.
- (8) Suction Gage -- Check (4.6 to 5.4 inches of mercury).
- (9) Magnetos -- Check (50 RPM maximum differential between magnetos).
- (10) Carburetor Heat -- Check operation.
- (11) Propeller -- Cycle from high to low RPM; return to high RPM (full in).
- (12) Flight Instruments and Radios -- Set.
- (13) Optional Autopilot or Wing Leveler -- "OFF".
- (14) Cabin Doors and Window -- Closed and locked.

## **TAKE-OFF.**

### **NORMAL TAKE-OFF.**

- (1) Wing Flaps -- Up.
- (2) Carburetor Heat -- Cold.
- (3) Power -- Full throttle and 2600 RPM.
- (4) Elevator Control -- Raise nosewheel at 60 MPH.
- (5) Climb Speed -- 90 MPH until all obstacles are cleared, then set up climb speed as shown in "NORMAL CLIMB" check list.

### **MAXIMUM PERFORMANCE TAKE-OFF.**

- (1) Wing Flaps -- 20°.
- (2) Carburetor Heat -- Cold.
- (3) Brakes -- Apply.
- (4) Power -- Full throttle and 2600 RPM.
- (5) Brakes -- Release.
- (6) Elevator Control -- Maintain slightly tail-low attitude.
- (7) Climb Speed -- 63 MPH until all obstacles are cleared, then set up climb speed as shown in "MAXIMUM PERFORMANCE CLIMB" check list.
- (8) Wing Flaps -- Up after obstacles are cleared.

## **CLIMB.**

### **NORMAL CLIMB.**

- (1) Airspeed -- 100 to 110 MPH.
- (2) Power -- 23 inches and 2450 RPM.
- (3) Fuel Selector Valve Handle -- "BOTH."
- (4) Mixture -- Full rich (unless engine is rough due to excessively rich mixture).
- (5) Cowl Flaps -- Open as required.

### **MAXIMUM PERFORMANCE CLIMB.**

- (1) Airspeed -- 89 MPH (sea level) to 85 MPH (10,000 feet).
- (2) Power -- Full throttle and 2600 RPM.
- (3) Fuel Selector Valve Handle -- "BOTH."
- (4) Mixture -- Full rich (unless engine is rough).
- (5) Cowl Flaps -- Full "OPEN."

## **CRUISING.**

- (1) Engine Power -- 15 to 23 inches of manifold pressure and 2200 - 2450 RPM.
- (2) Cowl Flaps -- Open as required.
- (3) Elevator and Rudder Trim -- Adjust.
- (4) Mixture -- Lean.

## **LET-DOWN.**

- (1) Mixture -- Rich.
- (2) Power -- As desired.
- (3) Carburetor Heat -- Apply (if icing conditions exist).

## **BEFORE LANDING.**

- (1) Fuel Selector Valve Handle -- "BOTH."
- (2) Mixture -- Rich.
- (3) Propeller -- High RPM.
- (4) Cowl Flaps -- "CLOSED."
- (5) Carburetor Heat -- Apply before closing throttle.
- (6) Airspeed -- 80 to 90 MPH (flaps retracted).
- (7) Wing Flaps -- 0° to 40° (below 110 MPH).
- (8) Airspeed -- 70 to 80 MPH (flaps extended).
- (9) Elevator and Rudder Trim -- Adjust.

## **BALKED LANDING (GO-AROUND).**

- (1) Power -- Full throttle and 2600 RPM.
- (2) Carburetor Heat -- Cold.
- (3) Wing Flaps -- Retract to 20°.
- (4) Cowl Flaps -- "OPEN."
- (5) Upon reaching an airspeed of approximately 80 MPH, retract flaps slowly.

## **NORMAL LANDING.**

- (1) Touchdown -- Main wheels first.



- (2) Landing Roll -- Lower nose wheel gently.
- (3) Braking -- Minimum required.

## **AFTER LANDING.**

- (1) Cowl Flaps -- "OPEN."
- (2) Wing Flaps -- Retract.
- (3) Carburetor Heat -- Cold.

## **SECURING AIRCRAFT.**


- (1) Parking Brake -- Set.
- (2) Radios and Electrical Equipment -- "OFF".
- (3) Mixture -- Idle cut-off (pulled full out).

### **NOTE**

Do not open throttle as engine stops since this actuates the accelerator pump.

- (4) Ignition and Master Switch -- "OFF".
- (5) Control Lock -- Installed.

# INSTRUMENT PANEL

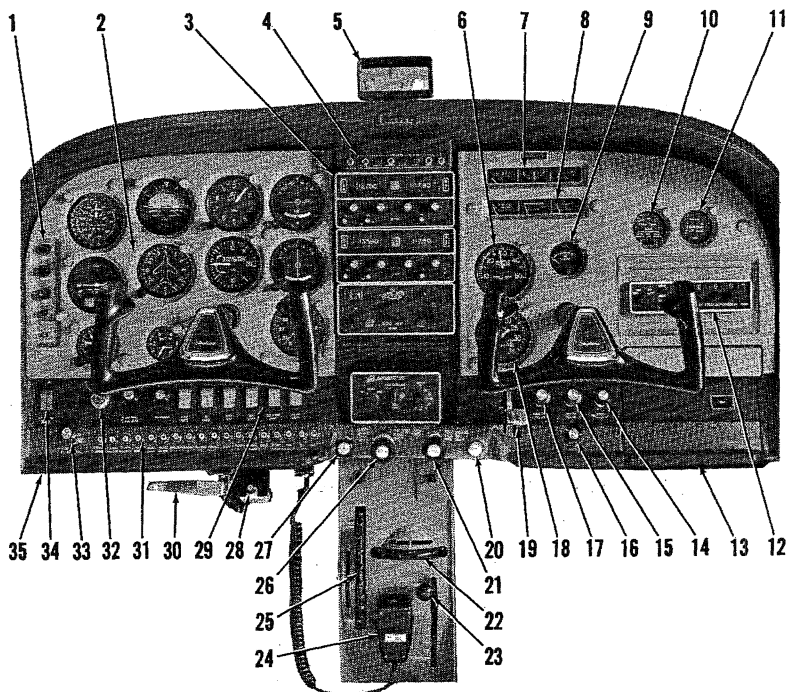

- |  |   |
|--|---|
| 1. Marker Beacon Indicator Lights and Switches (Opt.)                          | 22. Rudder Trim Control Wheel                     |
| 2. Flight Instrument Group   | 23. Cowl Flap Control Handle                      |
| 3. Radios and Autopilot (Opt.)   | 24. Microphone (Opt.)                             |
| 4. Radio Selector Switches (Opt.)  | 25. Elevator Trim Control Wheel                   |
| 5. Rear View Mirror (Opt.)   | 26. Throttle                                      |
| 6. Manifold Pressure Gage  | 27. Carburetor Heat Control Knob                  |
| 7. Fuel Quantity Indicators and Ammeter  | 28. Static Pressure Alternate Source Valve (Opt.) |
| 8. Cylinder Head Temperature Gage, Oil Temperature Gage, and Oil Pressure Gage | 29. Parking Brake Handle                          |
| 9. Economy Mixture Indicator (Opt.)  | 30. Ignition/Starter Switch                       |
| 10. Carburetor Air Temperature Gage (Opt.)                                     | 31. Primer  |
| 11. Flight Hour Recorder (Opt.)  | 32. Master Switch                                 |
| 12. Transponder (Opt.)   | 33. Phone Jack                                    |
| 13. Map Compartment  |   |
| 14. Defroster Control Knob   |   |
| 15. Cabin Air Control Knob   |   |
| 16. Cigar Lighter  |   |
| 17. Cabin Heat Control Knob  |   |
| 18. Tachometer   |   |
| 19. Wing Flap Switch   |   |
| 20. Mixture Control Knob   |   |
| 21. Propeller Control Knob   |   |

Figure 2-1.

# *Section II*

## DESCRIPTION AND OPERATING DETAILS

The following paragraphs describe the systems and equipment whose function and operation is not obvious when sitting in the airplane. This section also covers in somewhat greater detail some of the items listed in Check List form in Section I that require further explanation.

### FUEL SYSTEM.

Fuel is supplied to the engine from two tanks, one in each wing. With the fuel selector valve on "BOTH," the total usable fuel for all flight conditions is 60 gallons for the standard tanks and 79 gallons for optional long range tanks.

Fuel from each wing tank flows by gravity to a selector valve. Depending upon the setting of the selector valve, fuel from the left, right, or both tanks flows through a fuel strainer and carburetor to the engine induction system.

#### IMPORTANT

The fuel selector valve should be in the "BOTH" position for take-off, climb, landing, and maneuvers that involve prolonged slips or skids. Operation from either "LEFT" or "RIGHT" tank is reserved for cruising flight.

#### NOTE

When the fuel selector valve handle is in the "BOTH" position in cruising flight, unequal fuel flow from each tank may occur if the wings are not maintained exactly level. Resulting wing heaviness can be alleviated gradually by turning the selector valve handle to the tank in the "heavy" wing.

For fuel system servicing information, refer to Lubrication and Servicing Procedures in Section V.

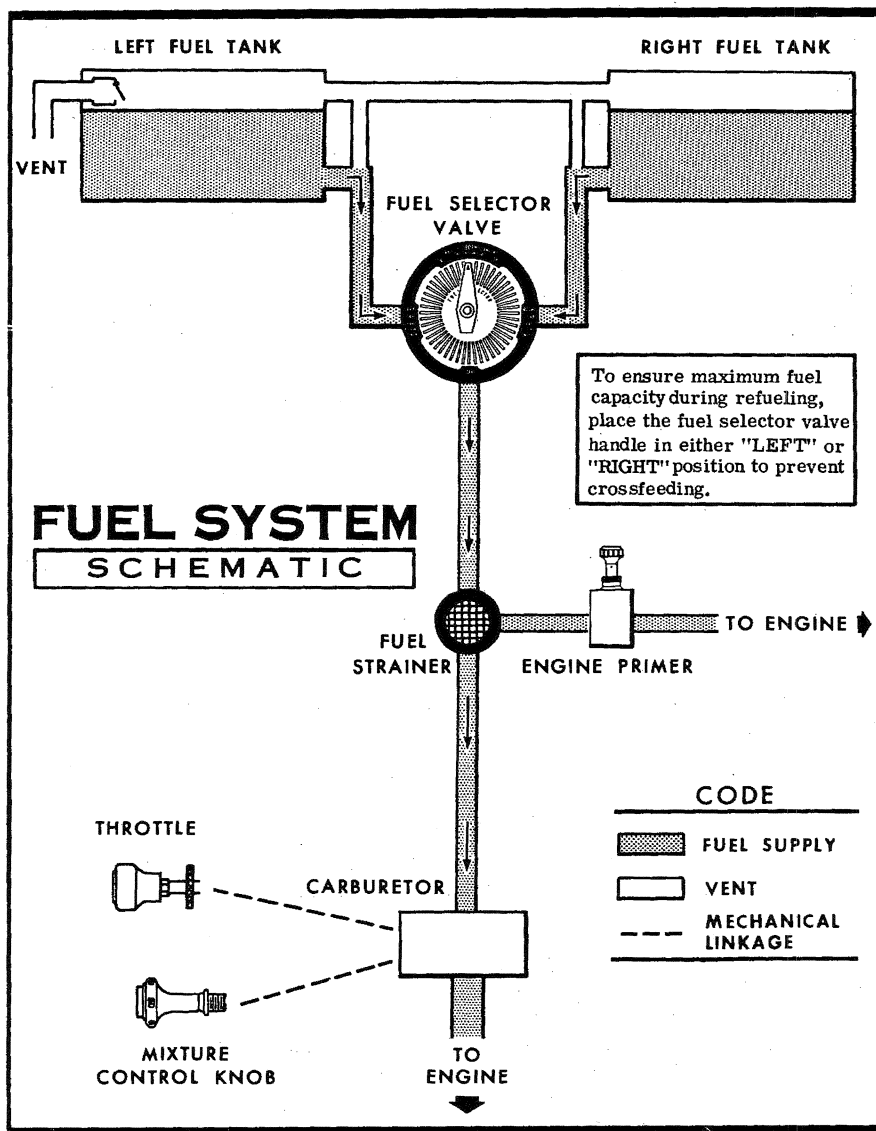


Figure 2-2.

## **ELECTRICAL SYSTEM.**

Electrical energy is supplied by a 14-volt, direct-current system powered by an engine-driven alternator (see figure 2-3). The 12-volt battery is located aft of the rear baggage compartment wall. Power is supplied to all electrical circuits through a split bus bar, one side containing electronic system circuits and the other side having general electrical system circuits. Both sides of the bus are on at all times except when either an external power source is connected or the starter switch is turned on; then a power contactor is automatically activated to open the circuit to the electronics bus. Isolating the electronic circuits in this manner prevents harmful transient voltages from damaging the transistors in the electronics equipment.

### **MASTER SWITCH.**

The master switch is a split-rocker type switch labeled "MASTER," and is "ON" in the up position and "OFF" in the down position. The right half of the switch, labeled "BAT," controls all electrical power to the airplane. The left half labeled "ALT" controls the alternator.

Normally, both sides of the master switch should be used simultaneously, however, the "BAT" side of the switch could be turned "ON" separately to check equipment while on the ground. The "ALT" side of the switch, when placed in the "OFF" position, removes the alternator from the electrical system. With this switch in the "OFF" position, the entire electrical load is placed on the battery, and all non-essential electrical equipment should be turned off for the remainder of the flight.

### **AMMETER.**

The ammeter indicates the flow of current, in amperes, from the alternator to the battery or from the battery to the aircraft electrical system. When the engine is operating and the master switch is "ON," the ammeter indicates the charging rate applied to the battery. In the event the alternator is not functioning or the electrical load exceeds the output of the alternator, the ammeter indicates the discharge rate of the battery.

### **CIRCUIT BREAKERS AND FUSES.**

Most of the electrical circuits in the airplane are protected by "push-to-reset" circuit breakers mounted on the instrument panel. Exceptions to this are the battery contactor closing (external power) circuit, and the optional clock and flight hour recorder circuits which have fuses mounted

# ELECTRICAL SYSTEM

## SCHEMATIC

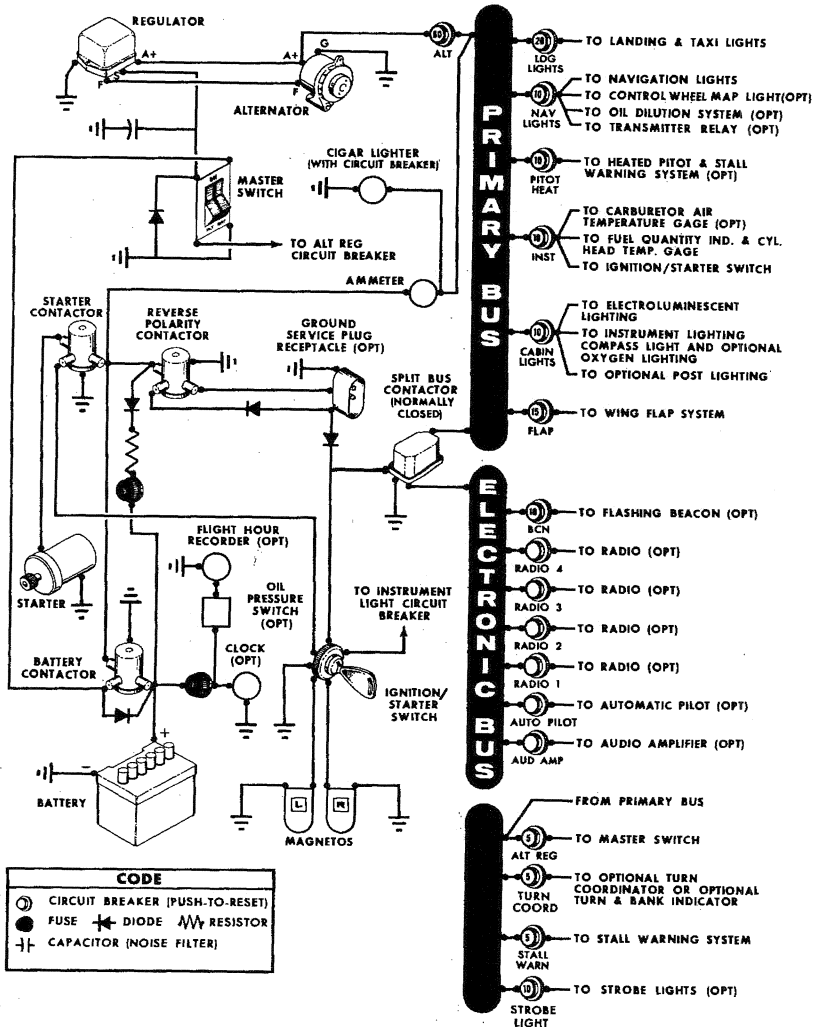


Figure 2-3.

near the battery. Also, the cigar lighter is protected by a manually-reset type circuit breaker mounted directly on the back of the lighter behind the instrument panel.

When more than one radio is installed, the radio transmitter relay (which is a part of the radio installation) is protected by the navigation lights circuit breaker labeled "NAV LIGHTS". If a malfunction in the navigation lights system causes the circuit breaker to open, de-activating the lights and transmitter relay, turn off the navigation light switch and reset the circuit breaker. This will re-activate the transmitter relay and permit its usage. Do not turn the switch on again until the malfunction is corrected.

## **LIGHTING EQUIPMENT.**

### **EXTERIOR LIGHTING.**

Conventional navigation lights are located in the wing tips and the tail stinger. Dual beam landing lights are installed in the left wing leading edge. The lower beam light also serves as a taxi light. Optional lighting which may be installed includes: a flashing beacon mounted on top of the vertical fin; two strobe lights, one mounted in each wing tip; and two courtesy lights, one located under each wing just outboard of the cabin door. All exterior lights except the courtesy lights are controlled by rocker-type switches located on the left switch and control panel. The courtesy lights are operated by a switch on the aft side of the left rear door post.

The flashing beacon should not be used when flying through clouds or overcast; the flashing light reflected from water droplets or particles in the atmosphere, particularly at night, can produce vertigo and loss of orientation.

The two high intensity strobe lights will enhance anti-collision protection. However, the lights should be turned off when taxiing in the vicinity of other aircraft, or during flight through clouds, fog or haze.

### **INTERIOR LIGHTING.**

Instrument and control panel lighting is provided by three main sources, electroluminescent lighting, flood lighting, and optional post lighting. The engine instruments, magnetic compass, and radios have their own light source. All instrument and control panel lights (including

engine instruments, compass, and radios) are controlled by two dimming rheostats and one rocker-type lighting selector switch used for selecting post or flood lighting.

Switches and controls on the lower part of the instrument panel are lighted by electroluminescent panels which do not require light bulbs for illumination. This lighting is controlled by the inner intensity control knob labeled "LWR PANEL".

Five red lights are located in the glare shield above the instrument panel for panel flood lighting. The lights are turned on by placing the lighting selector switch in the "FLOOD LIGHTS" position and adjusting the intensity of the outer four lights with the control knob labeled "INSTRUMENTS." When post lights are turned on, all glare shield lights will turn off with the exception of the light above the radio selector switch panel. The engine instrument cluster, magnetic compass and radios have integral lighting. This lighting (and the center glare shield light above the radio selector switch panel) is controlled by the outer intensity control knob labeled "ENG-RADIO."

The overhead console contains additional instrument panel flood lighting and map lighting. Two openings facing forward from the console provide red flood lighting. Two additional openings facing aft function as white map lights. The aft openings have sliding covers which are controlled by small round knobs. To utilize the map lighting, slide the covers open by moving the two knobs toward each other. If map lighting is not needed, close the sliding covers. To use the console lights, place the lighting selector switch in the "FLOOD LIGHTS" position, and adjust the intensity with the control knob labeled "INSTRUMENTS."

The instrument panel, and overhead oxygen console (optional) may be equipped with optional post lights to further increase night lighting. The post lights are located at the edge of each instrument or control to be lighted. To operate the post lights, place lighting selector switch in the "POST" position and adjust light intensity with the "INSTRUMENTS" intensity control knob.

An optional map light may be mounted on the bottom of the pilot's control wheel. The light illuminates the lower portion of the cabin just forward of the pilot and is helpful when checking maps and other flight data during night operations. To operate the light, first turn on the "NAV LIGHTS" switch, then adjust the map light's intensity with the knurled disk type rheostat control located at the bottom of the control wheel.



Two utility lights are mounted in the ceiling of the rear cabin area as an aid to loading of passengers during night operations. These lights are controlled by the same switch which operates the courtesy lights located under the wings. The switch is located on the left rear door post.

## **CABIN HEATING, VENTILATING AND DEFROSTING SYSTEM.**

The temperature and volume of airflow into the cabin can be regulated to any degree desired by manipulation of the push-pull "CABIN HEAT" and "CABIN AIR" knobs. Both control knobs are the double-button type with friction locks to permit intermediate settings.

### **NOTE**

Always pull out the "CABIN AIR" knob slightly when the "CABIN HEAT" knob is out. This action increases the airflow through the system, increasing efficiency, and blends cool outside air with the exhaust manifold heated air, thus eliminating the possibility of overheating the system ducting.

The rotary type "DEFROST" knob regulates the airflow for windshield defrosting.

Front cabin heat and ventilating air is supplied by outlet holes spaced across a cabin manifold just forward of the pilot's and copilot's feet. Rear cabin heat and air are supplied by two ducts from the manifold, one extending down each side of the cabin to an outlet at the front door post at floor level. Windshield defrost air is also supplied by a duct leading from the cabin manifold.

Separate adjustable ventilators supply additional air; one near each upper corner of the windshield supplies air for the pilot and copilot, and two optional ventilators in the rear cabin ceiling supply air to the rear seat passengers.

## **SHOULDER HARNESES.**

Shoulder harnesses are provided as standard equipment for the pilot and front seat passenger, and as optional equipment for the rear seat passengers.

Each front seat harness is attached to a rear door post just above window line and is stowed above the cabin door. When stowed, the harness is held in place by two retaining clips, one above the door and one at the top of the forward door post. The optional rear seat shoulder harnesses are attached adjacent to the lower corners of the rear window. Each rear seat harness is stowed behind a retaining clip located at the bottom edge of the aft side window.

To use the front and rear seat shoulder harnesses, fasten and adjust the seat belt first. Remove the harness from the stowed position, and lengthen as required by pulling on the end of the harness and the narrow release strap. Snap the harness metal stud firmly into the retaining slot adjacent to the seat belt buckle. Then adjust to length by pulling down on the free end of the harness. A properly adjusted harness will permit the occupant to lean forward enough to sit completely erect but is tight enough to prevent excessive forward movement and contact with objects during sudden deceleration. Also, the pilot will want the freedom to reach all controls easily.


Releasing and removing the shoulder harness is accomplished by pulling upward on the narrow release strap, then removing the harness stud from the slot in the seat belt buckle. In an emergency, the shoulder harness may be removed by releasing the seat belt first, then pulling the harness over the head by pulling up on the release strap.

## **STARTING ENGINE.**

Ordinarily the engine starts easily with one or two strokes of the primer in warm temperatures to six strokes in cold weather with the throttle open approximately 1/2 inch. In extremely cold temperatures it may be necessary to continue priming while cranking. Weak intermittent firing followed by puffs of black smoke from the exhaust stack indicate overpriming or flooding. Excess fuel can be cleared from the combustion chambers by the following procedure: Set the mixture control full lean and the throttle full open; then crank the engine through several revolutions with the starter. Repeat the starting procedure without any additional priming.

If the engine is underprimed (most likely in cold weather with a cold engine) it will not fire at all. Additional priming will be necessary for the next starting attempt. As soon as the cylinders begin to fire, open the throttle slightly to keep it running.

## TAXIING DIAGRAM

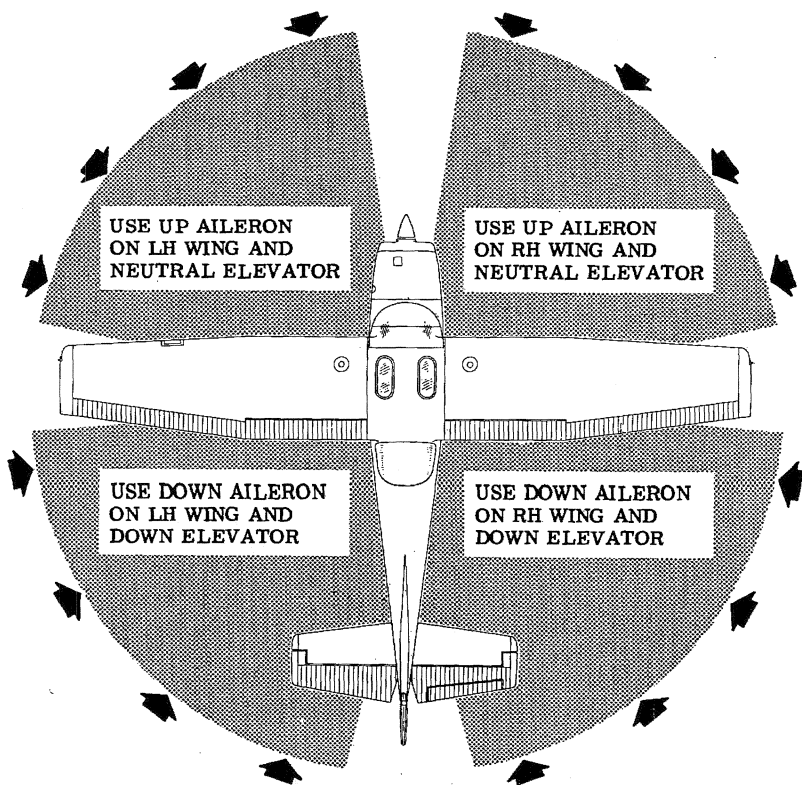

### CODE

WIND DIRECTION



### NOTE

Strong quartering tail winds require caution. Avoid sudden bursts of the throttle and sharp braking when the airplane is in this attitude. Use the steerable nose wheel and rudder to maintain direction.

Figure 2-4.

If prolonged cranking is necessary, allow the starter motor to cool at frequent intervals, since excessive heat may damage the armature.

## **TAXIING.**

The carburetor air heat knob should be pushed full in during all ground operations unless heat is absolutely necessary for smooth engine operation. When the knob is pulled out to the heat position, air entering the engine is not filtered.

Taxiing over loose gravel or cinders should be done at low engine speed to avoid abrasion and stone damage to the propeller tips. Refer to figure 2-4 for additional taxiing instructions.

## **BEFORE TAKE-OFF.**

Since the engine is closely cowled for efficient in-flight cooling, precautions should be taken to avoid overheating on the ground. Full throttle checks on the ground are not recommended unless the pilot has good reason to suspect that the engine is not turning up properly.

The magneto check should be made at 1700 RPM with the propeller in flat pitch as follows: Move the ignition switch first to "R" position and note RPM. Then move switch back to "BOTH" position to clear the other set of plugs. Then move switch to "L" position, note RPM and return the switch to the "BOTH" position. The difference between the two magnetos operated singly should not be more than 50 RPM. If there is a doubt concerning the operation of the ignition system, RPM checks at a higher engine speed will usually confirm whether a deficiency exists.

An absence of RPM drop may be an indication of faulty grounding of one side of the ignition system or should be cause for suspicion that the magneto timing is set in advance of the setting specified.

## **ALTERNATOR CHECK.**

Prior to flights where verification of proper alternator and voltage regulator operation is essential (such as night or instrument flights), a positive verification can be made by loading the electrical system momentarily (3 to 5 seconds) with the landing light during the engine run-up (1700 RPM). The ammeter will remain within a needle width of zero if the alternator and voltage regulator are operating properly.

## TAKE-OFF.

It is important to check full-throttle engine operation early in the take-off run. Any signs of rough engine operation or sluggish engine acceleration is good cause for discontinuing the take-off.

Full throttle runups over loose gravel are especially harmful to propeller tips. When take-offs must be made over a gravel surface, it is very important that the throttle be advanced slowly. This allows the airplane to start rolling before high RPM is developed, and the gravel will be blown back of the propeller rather than pulled into it.

Most engine wear occurs from improper operation before the engine is up to normal operating temperatures, and operating at high powers and RPM's. For this reason the use of maximum power for take-off climb should be limited to that absolutely necessary for safety. Whenever possible, reduce take-off power to normal climb power.

Normal take-offs are accomplished with wing flaps up, cowl flaps open, full throttle, and 2600 RPM. Reduce power to 23 inches of manifold pressure and 2450 RPM as soon as practical to minimize engine wear.

Using 20° wing flaps reduces the ground run and total distance over the obstacle by approximately 20 per cent. Soft field take-offs are performed with 20° flaps by lifting the airplane off the ground as soon as practical in a slightly tail-low attitude. However, the airplane should be leveled off immediately to accelerate to a safe climb speed.

If 20° wing flaps are used for take-off, they should be left down until all obstacles are cleared. To clear an obstacle with wing flaps 20 degrees, an obstacle clearance speed of 63 MPH should be used. If no obstructions are ahead, a best "flaps up" rate-of-climb speed of 89 MPH would be most efficient. These speeds vary slightly with altitude, but they are close enough for average field elevations. Flap deflections of 30° to 40° are not recommended at any time for take-off.

Take-offs into strong crosswinds normally are performed with the minimum flap setting necessary for the field length, to minimize the drift angle immediately after take-off. The airplane is accelerated to a speed slightly higher than normal, then pulled off abruptly to prevent possible settling back to the runway while drifting. When clear of the ground, make a coordinated turn into the wind to correct for drift.

**CLIMB.**

A cruising climb at 23 inches of manifold pressure, 2450 RPM (approximately 75% power) and 100 to 120 MPH is recommended to save time and fuel for the overall trip. In addition, this type of climb provides better engine cooling, less engine wear, and more passenger comfort due to lower noise level.

If it is necessary to climb rapidly to clear mountains or reach favorable winds at high altitudes, the best rate-of-climb speed should be used with maximum power. This speed is 89 MPH at sea level, decreasing 2 MPH for each 5000 feet above sea level.

If an obstruction ahead requires a steep climb angle, the airplane should be flown at an obstacle clearance speed of approximately 70 MPH with flaps up and maximum power.

**CRUISE.**

Normal cruising is done between 65% and 75% power. The power settings required to obtain these powers at various altitudes and outside air temperatures can be determined by using your Cessna Power Computer or the OPERATIONAL DATA, Section VI.

The Maximum Cruise Speed Performance table (figure 2-5) shows that cruising can be done most efficiently at higher altitudes because very nearly the same cruising speed can be maintained at much less power.

MAXIMUM CRUISE SPEED PERFORMANCE			
ALTITUDE	% POWER	TRUE AIRSPEED	RANGE (STD. TANKS)
6500	75	160	690
8000	70	158	730
10,000	65	156	775

Figure 2-5.

For a given throttle setting, select the lowest engine RPM in the green arc range that will give smooth engine operation.

The cowl flaps should be adjusted to maintain the cylinder head temperature at approximately two thirds of the normal operating (green arc) range to assure prolonged engine life.

To achieve the range figures shown in Section VI, the mixture should be leaned as follows: pull mixture control out until engine becomes rough; then enrich mixture slightly from this point. Any change in altitude, power, or carburetor heat will require a change in the lean mixture setting.

Application of full carburetor heat may enrich the mixture to the point of engine roughness. To avoid this, lean the mixture as instructed in the preceding paragraph.

The use of full carburetor heat is recommended during flight in very heavy rain to avoid the possibility of engine stoppage due to excessive water ingestion. The mixture setting should be readjusted for smoothest operation.

## **STALLS.**

The stall characteristics are conventional and aural warning is provided by a stall warning horn which sounds between 5 and 10 MPH above the stall in all configurations.

Power-off stall speeds at maximum gross weight and aft c.g. position are presented in figure 6-2 as calibrated airspeeds since indicated airspeeds are unreliable near the stall.

## **SPINS.**

Intentional spins are prohibited in this airplane. Should an inadvertent spin occur, the following recovery technique should be used.

- (1) Retard throttle to idle position.
- (2) Apply full rudder opposite to the direction of rotation.
- (3) After one-fourth turn, move the control wheel forward of neutral in a brisk motion.
- (4) As rotation stops, neutralize rudder, and make a smooth recovery from the resulting dive.

## **LANDING.**

### **NORMAL LANDING.**

Landings should be made on the main wheels first to reduce the landing speed and the subsequent need for braking in the landing roll. The nose wheel is lowered gently to the runway after the speed has diminished to avoid unnecessary nose gear load. This procedure is especially important in rough field landings.

### **SHORT FIELD LANDING.**

For short field landings, make a power-off approach at 69 MPH with 40° flaps and land on the main wheels first. Immediately after touchdown, lower the nose gear to the ground and apply heavy braking as required. For maximum brake effectiveness after all three wheels are on the ground, retract the flaps, hold full nose up elevator and apply maximum possible brake pressure without sliding the tires.

### **CROSSWIND LANDING.**

When landing in a strong crosswind, use the minimum flap setting required for the field length. Although the crab or combination method of drift correction may be used, the wing-low method gives the best control. After touchdown, hold a straight course with the steerable nose wheel and occasional braking if necessary.

### **BALKED LANDING (GO-AROUND).**

In a balked landing (go-around) climb, the wing flap setting should be reduced to 20° immediately after full power is applied. After all obstacles are cleared and a safe altitude and airspeed are obtained, the wing flaps should be retracted.

## **COLD WEATHER OPERATION.**

### **STARTING.**

Prior to starting on a cold morning, it is advisable to pull the propeller through several times by hand to "break loose" or "limber" the oil, thus conserving battery energy.



## NOTE

When pulling the propeller through by hand, treat it as if the ignition switch is turned on. A loose or broken ground wire on either magneto could cause the engine to fire.

In extremely cold (0°F and lower) weather, the use of an external preheater (for both the engine and battery) and an external power source is recommended whenever possible to obtain positive starting and to reduce wear and abuse to the engine and the electrical system. Pre-heat will thaw the oil trapped in the oil cooler, which probably will be congealed prior to starting in extremely cold temperatures. When using an external power source, the position of the master switch is important. Refer to Section VII, paragraph Ground Service Plug Receptacle, for operating details.

Cold weather starting procedures are as follows:

### With Preheat:

(1) With ignition switch "OFF", mixture full rich, and throttle open 1/2", prime the engine four to eight strokes as the propeller is being turned over by hand.

## NOTE

Use heavy strokes of primer for best atomization of fuel. After priming, push primer all the way in and turn to locked position to avoid possibility of engine drawing fuel through the primer.

- (2) Clear propeller.
- (3) Turn master switch "ON."
- (4) Turn ignition switch to "START."
- (5) Pull carburetor heat on after engine has started, and leave on until the engine is running smoothly.

### Without Preheat:

- (1) Prime the engine six to eight strokes while the propeller is being turned by hand with mixture full rich and throttle open 1/2". Leave the primer charged and ready for stroke.
- (2) Clear propeller.

- (3) Turn master switch "ON".
- (4) Turn ignition switch to "START".
- (5) Pump throttle rapidly to full open twice. Return to 1/2" open position.
- (6) Release ignition switch to "BOTH" when engine starts.
- (7) Continue to prime the engine until it is running smoothly, or alternately, pump the throttle rapidly over the first 1/4 of total travel.
- (8) Oil pressure -- Check.
- (9) Pull carburetor heat on after engine has started. Leave on until the engine is running smoothly.
- (10) Lock primer.

#### NOTE

If the engine does not start during the first few attempts, or if engine firing diminishes in strength, it is probable that the spark plugs have been frosted over. Preheat must be used before another start is attempted.

#### IMPORTANT

Excessive priming and pumping throttle may cause raw fuel to accumulate in the intake air duct, creating a fire hazard in the event of a backfire. If this occurs, maintain a cranking action to suck flames into the engine. An outside attendant with a fire extinguisher is advised for cold starts without preheat.

#### OPERATION.

During cold weather operations, no indication will be apparent on the oil temperature gage prior to take-off if outside air temperatures are very cold. After a suitable warm-up period (2 to 5 minutes at 1000 RPM), accelerate the engine several times to higher engine RPM. If the engine accelerates smoothly and the oil pressure remains normal and steady, the airplane is ready for take-off.

Rough engine operation in cold weather can be caused by a combination of an inherently leaner mixture due to the dense air and poor vaporization and distribution of the fuel-air mixture to the cylinders. The effects of these conditions are especially noticeable during operation on

one magneto in ground checks where only one spark plug fires in each cylinder.

To operate the engine without a winterization kit in occasional outside air temperatures from 10° to 20° F, the following procedure is recommended:

- (1) Use full carburetor heat during engine warm-up and ground check.
- (2) Use minimum carburetor heat required for smooth operation in take-off, climb, and cruise.
- (3) Select relatively high manifold pressure and RPM settings for optimum mixture distribution, and avoid excessive manual leaning in cruising flight.
- (4) Avoid sudden throttle movements during ground and flight operation.

When operating in sub-zero temperatures, avoid using partial carburetor heat. Partial heat may raise the carburetor air temperature to the 32° to 70° range where icing is critical under certain atmospheric conditions.

Refer to Section VII for cold weather equipment and operating details for the Oil Dilution System.

## **HOT WEATHER OPERATION.**

The general warm temperature starting information on page 2-8 is appropriate. Avoid prolonged engine operation on the ground.



# *Section III*

## **EMERGENCY PROCEDURES**

Emergencies caused by aircraft or engine malfunctions are extremely rare if proper pre-flight inspections and maintenance are practiced. Enroute weather emergencies can be minimized or eliminated by careful flight planning and good judgement when unexpected weather is encountered. However, should an emergency arise, the basic guidelines described in this section should be considered and applied as necessary to correct the problem.

### **ELECTRICAL POWER SUPPLY SYSTEM MALFUNCTIONS.**

Malfunctions in the electrical power supply system can be detected by periodic monitoring of the ammeter; however, the cause of these malfunctions is usually difficult to determine. A broken alternator drive belt or wiring is most likely the cause of alternator failures, although other factors could cause the problem. A damaged or improperly adjusted voltage regulator can also cause malfunctions. All electrical problems of this nature constitute an electrical emergency and should be dealt with immediately. Electrical power malfunctions usually fall into two categories, excessive rate of charge and insufficient rate of charge. The paragraphs below describe the recommended remedy for each situation.

#### **EXCESSIVE RATE OF CHARGE.**

After periods of engine starting and heavy electrical usage at low engine speeds (such as extended taxiing) the battery condition will be low enough to accept above normal charging during the initial part of a flight. However, after thirty minutes of cruising flight, the ammeter should be indicating less than two needle widths of charging current. If the charging rate remains above this value on a long flight, it is possible that the battery will overheat and evaporate the electrolyte at an excessive rate. In addition, electronic components in the electrical system could be adversely affected by the higher than normal voltage if a faulty voltage regulator setting is causing the overcharging.

To preclude these possibilities, the alternator side of the split master switch should be turned "OFF." The flight should be terminated and/or the current drain on the battery minimized as soon as practical because the battery can supply the electrical system for only a limited period of time. If it becomes apparent that the battery voltage is getting too low to operate the electrical system, the alternator switch can be turned back on for several minutes at a time until the battery is partially recharged. If the emergency occurs at night, the alternator switch should be returned to the "ON" position just before landing lights and flaps will be required for landing.

### **INSUFFICIENT RATE OF CHARGE.**

If the ammeter indicates a continuous discharge rate in flight, the alternator is not supplying power to the system and should be shut down since the alternator field circuit may be placing an unnecessary load on the system. All non-essential equipment should be turned "OFF" and the flight terminated as soon as practical.

## **ROUGH ENGINE OPERATION OR LOSS OF POWER.**

### **SPARK PLUG FOULING.**

A slight engine roughness in flight may be caused by one or more spark plugs becoming fouled by carbon or lead deposits. This may be verified by turning the ignition switch momentarily from "BOTH" to either "LEFT" or "RIGHT" position. An obvious power loss in single ignition operation is evidence of spark plug or magneto trouble. Assuming that spark plugs are the more likely cause, lean the mixture to the normal lean setting for cruising flight. If the problem does not clear up in several minutes, determine if a richer mixture setting will produce smoother operation. If not, proceed to the nearest airport for repairs using the "BOTH" position of the ignition switch unless extreme roughness dictates the use of a single ignition position.

### **MAGNETO MALFUNCTION.**

A sudden engine roughness or misfiring is usually evidence of magneto problems. Switching from "BOTH" to either "LEFT" or "RIGHT" ignition switch position will identify which magneto is malfunctioning. Select different power settings and enrichen the mixture to determine if continued operation on "BOTH" magnetos is practicable. If not, switch to the good magneto and proceed to the nearest airport for repairs.

## **LOW OIL PRESSURE.**

If low oil pressure is accompanied by normal oil temperature, there is a possibility the oil pressure gage or relief valve is malfunctioning. A leak in the line to the gage is not necessarily cause for an immediate precautionary landing because an orifice in this line will prevent a sudden loss of oil from the engine sump. However, a landing at the nearest airport would be advisable to inspect the source of trouble.

If a total loss of oil pressure is accompanied by a rise in oil temperature, there is reason to suspect an engine failure is imminent. Reduce engine power immediately and select a suitable forced landing field. Leave the engine running at low power during the approach, using only the minimum power required to reach the desired touchdown spot.

## **FORCED LANDINGS.**

### **PRECAUTIONARY LANDING WITH ENGINE POWER.**

Before attempting an "off airport" landing, one should drag the landing area at a safe but low altitude to inspect the terrain for obstructions and surface conditions, proceeding as follows:

- (1) Perform "before landing" check.
- (2) Drag over selected field with flaps 20° and 75 MPH airspeed, noting the preferred area for touchdown for the next landing approach. Then retract flaps upon reaching a safe altitude and airspeed.
- (3) On downwind leg, turn off all switches except the ignition and master switches.
- (4) Approach with flaps 40° at 75 MPH.
- (5) Unlatch cabin doors prior to final approach.
- (6) Before touchdown, turn ignition and master switches "OFF."
- (7) Land in a slightly tail-low attitude.

### **EMERGENCY LANDING WITHOUT ENGINE POWER.**

If an engine stoppage occurs, establish a flaps up glide at 80 MPH. If time permits, attempt to restart the engine by checking for fuel quantity, proper fuel selector valve position, and mixture control setting. Also check that engine primer is full in and locked and ignition switch is properly positioned.

If all attempts to restart the engine fail, and a forced landing is imminent, select a suitable field and prepare for the landing as follows:

- (1) Pull mixture control to idle cut-off position.
- (2) Turn fuel selector valve handle "OFF".
- (3) Turn all switches "OFF" except master switch.
- (4) Approach at 80 MPH.
- (5) Extend wing flaps as necessary within gliding distance of field.
- (6) Turn master switch "OFF."
- (7) Unlatch cabin doors prior to final approach.
- (8) Land in a slightly tail-low attitude.
- (9) Apply heavy braking while holding full up elevator.

## **DITCHING.**

Prepare for ditching by securing or jettisoning heavy objects located in the baggage area, and collect folded coats or cushions for protection of occupant's face at touchdown. Transmit Mayday message on 121.5 MHz. giving location and intentions.

- (1) Plan approach into wind if winds are high and seas are heavy. With heavy swells and light wind, land parallel to swells.
- (2) Approach with flaps 40° and sufficient power for a 300 ft./min. rate of descent at 70 MPH.
- (3) Unlatch the cabin doors.
- (4) Maintain a continuous descent until touchdown in level attitude. Avoid a landing flare because of difficulty in judging airplane height over a water surface.
- (5) Place folded coat or cushion in front of face at time of touchdown.
- (6) Evacuate airplane through cabin doors. If necessary, open vent windows to flood cabin compartment for equalizing pressure so that door can be opened.
- (7) Inflate life vests and raft (if available) after evacuation of cabin. The aircraft can not be depended on for floatation for more than a few minutes.

## **DISORIENTATION IN CLOUDS.**

When flying in marginal weather, the pilot should make sure that the



Wing Leveler (if installed) control knob is "ON." However, if the airplane is not equipped with this device or gyro horizon and directional gyro instruments, the pilot will have to rely on the turn coordinator (or turn and bank indicator) if he inadvertently flies into clouds. The following instructions assume that only one of the latter two instruments is available.

### **EXECUTING A 180° TURN IN CLOUDS.**

Upon entering the clouds, an immediate plan should be made to turn back as follows:

- (1) Note the time of the minute hand and observe the position of the sweep second hand on the clock.
- (2) When the sweep second hand indicates the nearest half-minute, initiate a standard rate left turn, holding the turn coordinator symbolic airplane wing opposite the lower left index mark for 60 seconds. Then roll back to level flight by leveling the miniature airplane.
- (3) Check accuracy of the turn by observing the compass heading which should be the reciprocal of the original heading.
- (4) If necessary, adjust heading primarily with skidding motions rather than rolling motions so that the compass will read more accurately.
- (5) Maintain altitude and airspeed by cautious application of elevator control. Avoid overcontrolling by keeping the hands off the control wheel and steering only with rudder.

### **EMERGENCY LET-DOWNS THROUGH CLOUDS.**

If possible, obtain radio clearance for an emergency descent through clouds. To guard against a spiral dive, choose an easterly or westerly heading to minimize compass card swings due to changing bank angles. In addition, keep hands off the control wheel and steer a straight course with rudder control by monitoring the turn coordinator. Occasionally check the compass heading and make minor corrections to hold an approximate course. Before descending into the clouds, set up a stabilized let-down condition as follows:

- (1) Apply full rich mixture.
- (2) Use full carburetor heat.
- (3) Reduce power to set up a 500 to 800 ft./min. rate of descent.
- (4) Adjust the elevator trim tab for a stabilized descent at 90 MPH.
- (5) Keep hands off the control wheel.
- (6) Monitor turn coordinator and make corrections by rudder alone.
- (7) Adjust rudder trim to relieve unbalanced rudder force, if present.

- (8) Check trend of compass card movement and make cautious corrections with rudder to stop the turn.
- (9) Upon breaking out of clouds, resume normal cruising flight.

## **RECOVERY FROM A SPIRAL DIVE.**

If a spiral is encountered, proceed as follows:

- (1) Close the throttle.
- (2) Stop the turn by using coordinated aileron and rudder control to align the symbolic airplane in the turn coordinator with the horizon reference line.
- (3) Cautiously apply elevator back pressure to slowly reduce the indicated airspeed to 90 MPH.
- (4) Adjust the elevator trim control to maintain a 90 MPH glide.
- (5) Keep hands off the control wheel, using rudder control to hold a straight heading. Use rudder trim to relieve unbalanced rudder force, if present.
- (6) Apply carburetor heat.
- (7) Clear engine occasionally, but avoid using enough power to disturb the trimmed glide.
- (8) Upon breaking out of clouds, apply normal cruising power and resume flight.

## **FIRES.**

### **ENGINE FIRE DURING START ON GROUND.**

Improper starting procedures such as pumping the throttle during a difficult cold weather start can cause a backfire which could ignite fuel that has accumulated in the intake duct. In this event, proceed as follows:

- (1) Continue cranking in an attempt to get a start which would suck the flames and accumulated fuel through the carburetor and into the engine.
- (2) If the start is successful, run the engine at 1700 RPM for a few minutes before shutting it down to inspect the damage.
- (3) If engine start is unsuccessful, continue cranking for two or three minutes with throttle full open while ground attendants obtain fire extinguishers.

- (4) When ready to extinguish fire, release the starter switch and turn off master switch, ignition switch, and fuel selector valve.
- (5) Smother flames with fire extinguisher, seat cushion, wool blanket, or loose dirt.
- (6) Make a thorough inspection of fire damage, and repair or replace damaged components before conducting another flight.

## **ENGINE FIRE IN FLIGHT.**

Although engine fires are extremely rare in flight, the following steps should be taken if one is encountered:

- (1) Pull mixture control to idle cut-off.
- (2) Turn fuel selector valve handle "OFF."
- (3) Turn master switch "OFF."
- (4) Establish a 100 MPH glide.
- (5) Close cabin heat and cabin air controls.
- (6) Select a field suitable for a forced landing.
- (7) If fire is not extinguished, increase glide speed in an attempt to find an airspeed that will provide an incombustible mixture.
- (8) Execute a forced landing as described in paragraph Emergency Landing Without Engine Power. Do not attempt to restart the engine.

## **ELECTRICAL FIRE IN FLIGHT.**

The initial indication of an electrical fire is the odor of burning insulation. The immediate response should be to turn the master switch "OFF." Then close off ventilating air as much as practicable to reduce the chances of a sustained fire. If an oxygen system is available in the aircraft and dense smoke makes breathing difficult, occupants should use oxygen masks until the smoke clears.

If electrical power is indispensable for the flight, an attempt may be made to identify and cut off the defective circuit as follows:

- (1) Master Switch -- "OFF."
- (2) All other switches (except ignition switch) -- "OFF."
- (3) Check condition of circuit breakers to identify faulty circuit if possible. Leave faulty circuit deactivated.
- (4) Master Switch -- "ON."
- (5) Select switches "ON" successively, permitting a short time delay to elapse after each switch is turned on until the short circuit is localized.
- (6) Make sure fire is completely extinguished before opening vents.

## FLIGHT IN ICING CONDITIONS.

Although flying in known icing conditions is prohibited, an unexpected icing encounter should be handled as follows:

- (1) Turn pitot heat switch "ON" (if installed).
- (2) Turn back or change altitude to obtain an outside air temperature that is less conducive to icing.
- (3) Pull cabin heater control full out and rotate defroster control clockwise to obtain windshield defroster airflow.
- (4) Increase engine speed to minimize ice build-up on propeller blades.
- (5) Watch for signs of carburetor air filter ice and apply carburetor heat as required. An unexplained loss in manifold pressure could be caused by carburetor ice or air intake filter ice.
- (6) Plan a landing at the nearest airport. With an extremely rapid ice build-up, select a suitable "off airport" landing site.
- (7) With an ice accumulation of one-quarter inch or more on the wing leading edges, be prepared for significantly higher stall speed.
- (8) Leave wing flaps retracted. With a severe ice build-up on the horizontal tail, the change in wing airflow direction caused by wing flap extension could result in a loss of elevator effectiveness.
- (9) Perform a landing approach using a forward slip, if necessary, for improved visibility.
- (10) Approach at 80 to 90 MPH, depending upon the amount of ice accumulation.
- (11) Perform a landing in level attitude.

# Section IV

## OPERATING LIMITATIONS

### OPERATIONS AUTHORIZED.

Your Cessna exceeds the requirements for airworthiness as set forth by the United States Government, and is certificated under FAA Type Certificate No. 3A13 as Cessna Model No. 182N.

With standard equipment, the airplane is approved for day and night operation under VFR. Additional optional equipment is available to increase its utility and to make it authorized for use under IFR day and night. An owner of a properly equipped Cessna is eligible to obtain approval for its operation on single-engine scheduled airline service. Your Cessna Dealer will be happy to assist you in selecting equipment best suited to your needs.

### MANEUVERS—NORMAL CATEGORY.

The airplane is certificated in the normal category. The normal category is applicable to airplanes intended for non-aerobatic operations. These include any maneuvers incidental to normal flying, stalls (except whip stalls) and turns in which the angle of bank is not more than 60°. In connection with the foregoing, the following gross weight and flight load factors apply:

Gross Weight:		
Take-Off . . . . .	2950 lbs	
Landing . . . . .	2800 lbs	
Flight Load Factor (at design gross weight of 2950 lbs):		
*Flaps Up . . . . .	+3.8	-1.52
*Flaps Down . . . . .	+3.5	

\*The design load factors are 150% of the above, and in all cases, the structure meets or exceeds design loads.

Your airplane must be operated in accordance with all FAA-approved markings, placards and check lists in the airplane. If there is any information in this section which contradicts the FAA-approved markings, placards and check lists, it is to be disregarded.

**AIRSPEED LIMITATIONS (CAS).**

The following is a list of the certificated calibrated airspeed (CAS) limitations for the airplane.

Never Exceed Speed (glide or dive, smooth air) . . . . .	198 MPH
Maximum Structural Cruising Speed . . . . .	160 MPH
Maximum Speed, Flaps Extended	
Flaps 10° . . . . .	160 MPH
Flaps 10° - 40° . . . . .	110 MPH
*Maneuvering Speed . . . . .	131 MPH

\*The maximum speed at which you may use abrupt control travel.

**AIRSPEED INDICATOR MARKINGS.**

The following is a list of the certificated calibrated airspeed markings (CAS) for the airplane.

Never Exceed (glide or dive, smooth air) . . . . .	198 MPH (red line)
Caution Range . . . . .	160-198 MPH (yellow arc)
Normal Operating Range . . . . .	68-160 MPH (green arc)
Flap Operating Range . . . . .	63-110 MPH (white arc)

**ENGINE OPERATION LIMITATIONS.**

Power and Speed . . . . .	230 BHP at 2600 RPM
---------------------------	---------------------

**ENGINE INSTRUMENT MARKINGS.**

**OIL TEMPERATURE GAGE.**

Normal Operating Range . . . . .	Green Arc
Do Not Exceed . . . . .	225° F (red line)

**OIL PRESSURE GAGE.**

Idling Pressure . . . . . 10 psi (red line)  
Normal Operating Range . . . . . 30-60 psi (green arc)  
Maximum Pressure . . . . . 100 psi (red line)

**FUEL QUANTITY INDICATORS.**

Empty . . . . . E (red line)  
(2.5 gallons unusable each tank in normal flight maneuvers  
with fuel selector valve on "BOTH. ")

**CYLINDER HEAD TEMPERATURE GAGE.**

Normal Operating Range . . . . . 200-460°F (green arc)  
Do Not Exceed . . . . . 460°F (red line)

**TACHOMETER.**

Normal Operating Range . . . . . 2200-2450 RPM (green arc)  
Do Not Exceed (Engine rated speed) . . . . . 2600 RPM (red line)

**MANIFOLD PRESSURE GAGE.**

Normal Operating Range . . . . . 15-23 in. Hg (green arc)

**CARBURETOR AIR TEMPERATURE GAGE (OPT).**

Icing Range . . . . . -15° to 5°C (yellow arc)

**WEIGHT AND BALANCE.**

The following information will enable you to operate your Cessna within the prescribed weight and center of gravity limitations. To figure the weight and balance for your particular airplane, use the Sample Problem, Loading Graph, and Center of Gravity Moment Envelope as follows:

Take the "Licensed Empty Weight" and "Moment" from the Weight and Balance Data Sheet (or changes noted on FAA Form 337) carried in your airplane, and write them down in the column titled "YOUR AIR-PLANE" on the Sample Loading Problem.

## NOTE


The Weight and Balance Data sheet is included in the aircraft file. In addition to the licensed empty weight and moment noted on this sheet, the c.g. arm (fuselage station) is shown. The c.g. arm figure need not be used on the Sample Loading Problem. The moment shown on the sheet must be divided by 1000 and this value used as the moment/1000 on the loading problem.

Use the Loading Graph to determine the moment/1000 for each additional item to be carried, then list these on the loading problem.

## NOTE

Loading Graph information is based on seats positioned for average occupants and baggage loaded in the center of the baggage area. For other than average loading situations, the Sample Loading Problem lists fuselage stations for these items to indicate their forward and aft c.g. range limitation (seat travel or baggage area limitation). Additional moment calculations, based on the actual weight and c.g. arm (fuselage station) of the item being loaded, must be made if the position of the load is different from that shown on the Loading Graph.

Total the weights and moments/1000 and plot these values on the Center of Gravity Moment Envelope to determine whether the point falls within the envelope, and if the loading is acceptable.

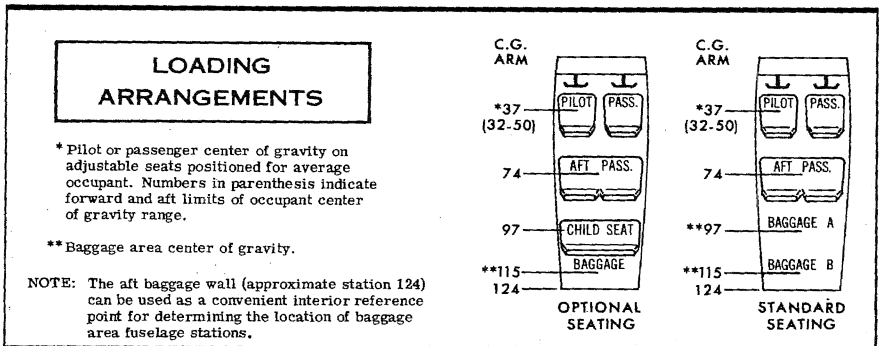




## SAMPLE LOADING PROBLEM


1. Licensed Empty Weight (Sample Airplane) . .
2. Oil (12 qts. - Full oil may be assumed  
for all flights) . . . . .
3. Fuel (Standard - 60 Gal at 6#/Gal) . . . . .  
Fuel (Long Range - 79 Gal at 6#/Gal) . . . . .
4. Pilot and Front Passenger (Station 32 to 50) .
5. Rear Passengers . . . . .
6. Baggage (Area "A") or passenger on Child's  
Seat (Station 82 to 108) . . . . .
7. Baggage - Aft (Area "B") (Station 108 to  
124) . . . . .
8. TOTAL WEIGHT AND MOMENT

9. Locate this point (2950 at 129.6) on the center of gravity moment envelope,  
and since this point falls within the envelope, the loading is acceptable.

	SAMPLE AIRPLANE		YOUR AIRPLANE	
	Weight (lbs.)	Moment (lb. -ins. /1000)	Weight (lbs.)	Moment (lb. -ins. /1000)
1. Licensed Empty Weight (Sample Airplane) . .	1714	60.1		
2. Oil (12 qts. - Full oil may be assumed for all flights) . . . . .	22	-0.3	22	-0.3
3. Fuel (Standard - 60 Gal at 6#/Gal) . . . . . Fuel (Long Range - 79 Gal at 6#/Gal) . . . . .	360	17.3		
4. Pilot and Front Passenger (Station 32 to 50) .	340	12.6		
5. Rear Passengers . . . . .	340	25.2		
6. Baggage (Area "A") or passenger on Child's Seat (Station 82 to 108) . . . . .	120	8.5		
7. Baggage - Aft (Area "B") (Station 108 to 124) . . . . .	54	6.2		
8. TOTAL WEIGHT AND MOMENT	2950	129.6		
9. Locate this point (2950 at 129.6) on the center of gravity moment envelope, and since this point falls within the envelope, the loading is acceptable.				

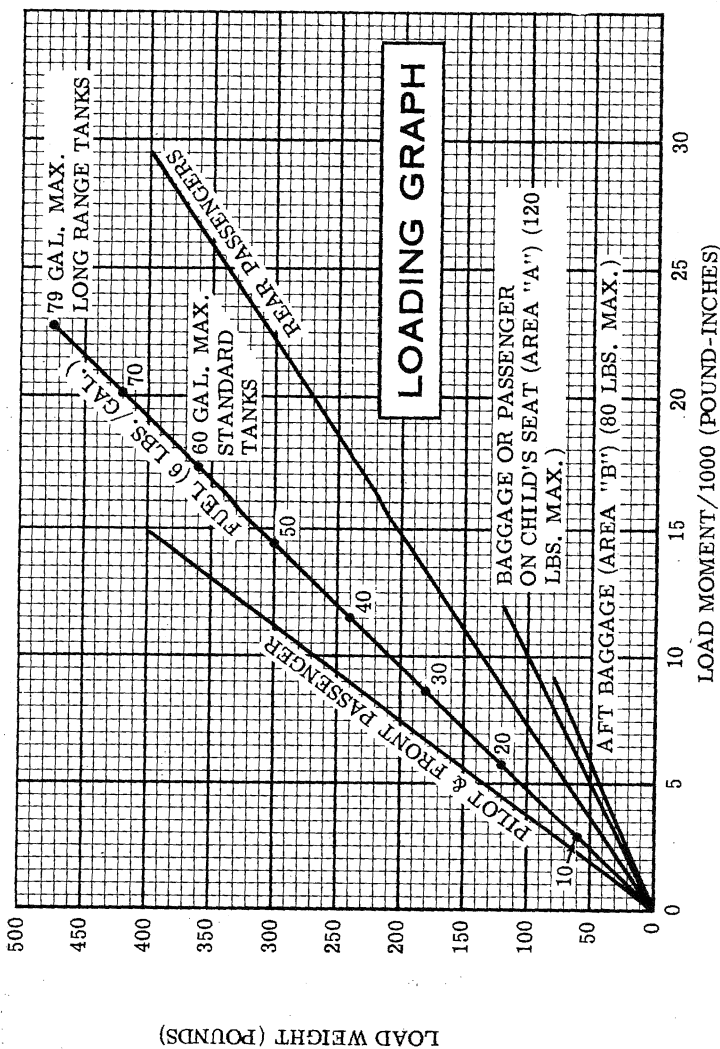

- NOTES: (1) Line representing adjustable seats shows pilot and front seat passenger center of gravity on adjustable seats positioned for an average occupant. Refer to the Loading Arrangements diagram for forward and aft limits of occupant c.g. range.
- (2) Engine Oil: 12 Qts = 22 Lbs. at -0.3 Moment/1000.

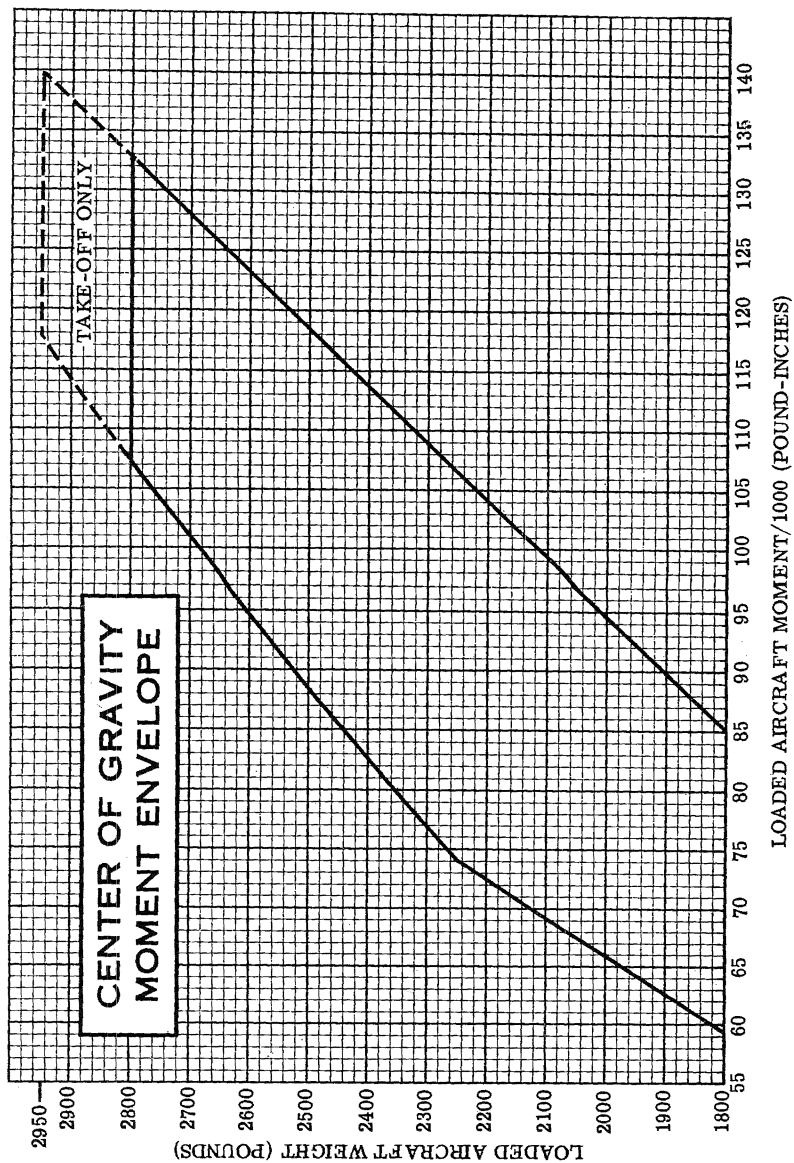



# *Section V*

## **CARE OF THE AIRPLANE**

If your airplane is to retain that new-plane performance and dependability, certain inspection and maintenance requirements must be followed. It is wise to follow a planned schedule of lubrication and preventive maintenance based on climatic and flying conditions encountered in your locality.

Keep in touch with your Cessna Dealer, and take advantage of his knowledge and experience. He knows your airplane and how to maintain it. He will remind you when lubrications and oil changes are necessary, and about other seasonal and periodic services.

## **GROUND HANDLING.**

The airplane is most easily and safely maneuvered during ground handling by a tow-bar attached to the nosewheel.

### **NOTE**

When using the tow-bar, do not exceed the nosewheel turning angle of approximately 30° either side of center.

## **MOORING YOUR AIRPLANE.**

Proper tie-down procedure is your best precaution against damage to your parked airplane by gusty or strong winds. To tie down your airplane securely, proceed as follows:

- (1) Set the parking brake and install the control wheel lock.
- (2) Install a surface control lock over the fin and rudder.
- (3) Tie sufficiently strong ropes or chains (700 pounds tensile strength) to the wing, tail, and nose tie-down fittings and secure each rope to a ramp tie-down.
- (4) Install a pitot tube cover.

## WINDSHIELD-WINDOWS.

The plastic windshield and windows should be cleaned with an aircraft windshield cleaner. Apply the cleaner sparingly with soft cloths, and rub with moderate pressure until all dirt, oil scum and bug stains are removed. Allow the cleaner to dry, then wipe it off with soft flannel cloths.

If a windshield cleaner is not available, the plastic can be cleaned with soft cloths moistened with Stoddard solvent to remove oil and grease.

### NOTE

Never use gasoline, benzine, alcohol, acetone, carbon tetrachloride, fire extinguisher or anti-ice fluid, lacquer thinner or glass cleaner to clean the plastic. These materials will attack the plastic and may cause it to craze.

Follow by carefully washing with a mild detergent and plenty of water. Rinse thoroughly, then dry with a clean moist chamois. Do not rub the plastic with a dry cloth since this builds up an electrostatic charge which attracts dust. Waxing with a good commercial wax will finish the cleaning job. A thin, even coat of wax, polished out by hand with clean soft flannel cloths, will fill in minor scratches and help prevent further scratching.

Do not use a canvas cover on the windshield unless freezing rain or sleet is anticipated since the cover may scratch the plastic surface.

## ALUMINUM SURFACES.

The clad aluminum surfaces of your Cessna may be washed with clear water to remove dirt; oil and grease may be removed with gasoline, naphtha, carbon tetrachloride or other non-alkaline solvents. Dulled aluminum surfaces may be cleaned effectively with an aircraft aluminum polish.

After cleaning, and periodically thereafter, waxing with a good automotive wax will preserve the bright appearance and retard corrosion. Regular waxing is especially recommended for airplanes operated in salt water areas as a protection against corrosion.

## **PAINTED SURFACES.**

The painted exterior surfaces of your new Cessna have a durable, long lasting finish and, under normal conditions, require no polishing or buffing. Approximately 15 days are required for the paint to cure completely; in most cases, the curing period will have been completed prior to delivery of the airplane. In the event that polishing or buffing is required within the curing period, it is recommended that the work be done by someone experienced in handling uncured paint. Any Cessna Dealer can accomplish this work.

Generally, the painted surfaces can be kept bright by washing with water and mild soap, followed by a rinse with water and drying with cloths or a chamois. Harsh or abrasive soaps or detergents which cause corrosion or scratches should never be used. Remove stubborn oil and grease with a cloth moistened with Stoddard solvent.

Waxing is unnecessary to keep the painted surfaces bright. However, if desired, the airplane may be waxed with a good automotive wax. A heavier coating of wax on the leading edges of the wings and tail and on the engine nose cap and propeller spinner will help reduce the abrasion encountered in these areas.

When the airplane is parked outside in cold climates and it is necessary to remove ice before flight, care should be taken to protect the painted surfaces during ice removal with chemical liquids. A 50-50 solution of isopropyl alcohol and water will satisfactorily remove ice accumulations without damaging the paint. A solution with more than 50% alcohol is harmful and should be avoided. While applying the de-icing solution, keep it away from the windshield and cabin windows since the alcohol will attack the plastic and may cause it to craze.

## **PROPELLER CARE.**

Preflight inspection of propeller blades for nicks, and wiping them occasionally with an oily cloth to clean off grass and bug stains will assure long, trouble-free service. Small nicks on the propeller, particularly near the tips and on the leading edges, should be dressed out as soon as possible since these nicks produce stress concentrations, and if ignored, may result in cracks. Never use an alkaline cleaner on the blades; remove grease and dirt with carbon tetrachloride or Stoddard solvent.

## INTERIOR CARE.

To remove dust and loose dirt from the upholstery and carpet, clean the interior regularly with a vacuum cleaner.

Blot up any spilled liquid promptly with cleansing tissue or rags. Don't pat the spot; press the blotting material firmly and hold it for several seconds. Continue blotting until no more liquid is taken up. Scrape off sticky materials with a dull knife, then spot-clean the area.

Oily spots may be cleaned with household spot removers, used sparingly. Before using any solvent, read the instructions on the container and test it on an obscure place on the fabric to be cleaned. Never saturate the fabric with a volatile solvent; it may damage the padding and backing materials.

Soiled upholstery and carpet may be cleaned with a foam-type detergent, used according to the manufacturer's instructions. Keep the foam as dry as possible and remove it with a vacuum cleaner, to minimize wetting the fabric.

The plastic trim, headliner, instrument panel and control knobs need only be wiped off with a damp cloth. Oil and grease on the control wheel and control knobs can be removed with a cloth moistened with Stoddard solvent. Volatile solvents, such as mentioned in paragraphs on care of the windshield, must never be used since they soften and craze the plastic.

Radio and autopilot faceplates are finished with a suede coating which produces a soft, rich appearance and warm feel comparable to suede. Unlike suede leather, dust and dirt marks can be removed easily with a damp sponge. Remove non-greasy stains with a liquid cleaner such as "Mr. Clean," "Handy Andy," "Lestoil," "Liquid Ajax," or "Cinch". Greasy stains can be removed with a naptha-dampened sponge, scrub brush or lint-free cloth.

## FLYABLE STORAGE.

Aircraft which are not in daily flight should have the engine started and warmed up at least once each week. In damp climates and in storage areas where the daily temperature variation can cause condensation, the warm-up operation should be accomplished more frequently. Warming up the engine replaces oil which has drained from surfaces of internal



parts while standing idle. Warm-up should be accomplished at a throttle setting necessary to produce an oil temperature within the lower green arc range.

#### NOTE

Excessive ground operation is to be avoided so that maximum cylinder head temperatures are not exceeded.

Engine warm-up also helps to eliminate excessive accumulations of water in the fuel system and other air spaces in the engine. Keep fuel tanks full to minimize condensation in the tanks. Keep the battery charged to prevent the electrolyte from freezing in cold weather. If the aircraft is to be stored temporarily, or indefinitely, refer to the Service Manual for proper storage procedures.

## INSPECTION SERVICE AND INSPECTION PERIODS.

With your airplane you will receive an Owner's Service Policy. Coupons attached to the policy entitle you to an initial inspection and the first 100-hour inspection at no charge. If you take delivery from your Dealer, he will perform the initial inspection before delivery of the airplane to you. If you pick up the airplane at the factory, plan to take it to your Dealer reasonably soon after you take delivery on it. This will permit him to check it over and to make any minor adjustments that may appear necessary. Also, plan an inspection by your Dealer at 100 hours or 180 days, whichever comes first. This inspection also is performed by your Dealer for you at no charge. While these important inspections will be performed for you by any Cessna Dealer, in most cases you will prefer to have the Dealer from whom you purchased the airplane accomplish this work.

Federal Aviation Regulations require that all airplanes have a periodic (annual) inspection as prescribed by the administrator, and performed by a person designated by the administrator. In addition, 100-hour periodic inspections made by an "appropriately-rated mechanic" are required if the airplane is flown for hire. The Cessna Aircraft Company recommends the 100-hour periodic inspection for your airplane. The procedure for this 100-hour inspection has been carefully worked out by the factory and is followed by the Cessna Dealer Organization. The complete familiarity of the Cessna Dealer Organization with Cessna equipment and with factory-approved procedures provides the highest type of service possible at lower cost.

## AIRCRAFT FILE.

There are miscellaneous data, information and licenses that are a part of the aircraft file. The following is a check list for that file. In addition, a periodic check should be made of the latest Federal Aviation Regulations to ensure that all data requirements are met.

A. To be displayed in the aircraft at all times:

- (1) Aircraft Airworthiness Certificate (FAA Form 8100-2).
- (2) Aircraft Registration Certificate (FAA Form 8050-3).
- (3) Aircraft Radio Station License, if transmitter installed (FCC Form 556).

B. To be carried in the aircraft at all times:

- (1) Weight and Balance, and associated papers (latest copy of the Repair and Alteration Form, FAA Form 337, if applicable).
- (2) Aircraft Equipment List.

C. To be made available upon request:

- (1) Aircraft Log Book.
- (2) Engine Log Book.

### NOTE

Cessna recommends that these items, plus the Owner's Manual, "Cessna Flight Guide" (Flight Computer), and Service Policies, be carried in the aircraft at all times.

Most of the items listed are required by the United States Federal Aviation Regulations. Since the regulations of other nations may require other documents and data, owners of exported aircraft should check with their own aviation officials to determine their individual requirements.

## **MAA PLATE/FINISH AND TRIM PLATE.**

Information concerning the Type Certificate Number (TC), Production Certificate Number (PC), Model Number and Serial Number of your particular aircraft can be found on the MAA (Manufacturers Aircraft Association) plate located on the left forward doorpost.

A Finish and Trim Plate contains a code describing the interior color scheme and exterior paint combination of the aircraft. The code may be used in conjunction with an applicable Parts Catalog if finish and trim information is needed. This plate is located at the bottom of the left forward door post.

# LUBRICATION AND SERVICING PROCEDURES

Specific servicing information is provided here for items requiring daily attention. A Servicing Intervals Check List is included to inform the pilot when to have other items checked and serviced.

## DAILY

### FUEL TANK FILLERS:

Service after each flight with 80/87 minimum grade fuel. The capacity of each tank is 32.5 gallons. When optional long range fuel tanks are installed, the capacity of each tank is 42.0 gallons. (To ensure maximum fuel capacity during refueling, place the fuel selector valve handle in either the "LEFT" or "RIGHT" position to prevent cross-feeding.)

### FUEL STRAINER:

On first flight of day and after each refueling, pull out strainer drain knob for about four seconds to clear fuel strainer of possible water and sediment. Check strainer drain closed. If water is observed, there is a possibility that the wing tank sumps contain water. Thus, the wing tank sump drain plugs and fuel selector valve drain plug should be removed to check for the presence of water.

### OIL FILLER:

When preflight check shows low oil level, service with aviation grade engine oil; SAE 50 above 40°F and SAE 10W30 or SAE 30 below 40°F. (Multi-viscosity oil with a range of SAE 10W30 is recommended for improved starting in cold weather.) Detergent or dispersant oil, conforming to Continental Motors Specification MHS-24A, must be used. Your Cessna Dealer can supply approved brands of oil.

### NOTE

To promote faster ring seating and improved oil control, your Cessna was delivered from the factory with straight mineral oil (non-detergent). This "break-in" oil should be used only for the first 20 to 30 hours of operation, at which time it must be replaced with detergent oil.

# **LUBRICATION AND SERVICING PROCEDURES**

## **DAILY (Continued)**

### **OIL DIPSTICK:**

Check oil level before each flight. Do not operate on less than 9 quarts. To minimize loss of oil through breather, fill to 10 quart level for normal flights of less than 3 hours. For extended flight, fill to 12 quarts. If optional oil filter is installed, one additional quart is required when the filter element is changed.

### **OXYGEN CYLINDER AND FILLER VALVE (OPT):**

Check oxygen pressure gage for anticipated requirements before each flight. Use filler valve on left side of rear baggage compartment wall to refill cylinder with aviator's breathing oxygen (Spec. No. MIL-O-27210). Maximum pressure (cylinder temperature stabilized after filling), 1800 psi at 70°F. Refer to page 7-11 for filling pressures.

## **SERVICING INTERVALS CHECK LIST**

### **EACH 50 HOURS**

**BATTERY** -- Check and service. Check more often (at least every 30 days if operating in hot weather.

**ENGINE OIL AND OIL FILTER** -- Change engine oil and replace filter element. If optional oil filter is not installed, change oil and clean screen every 25 hours. Change engine oil at least every four months even though less than 50 hours have been accumulated. Reduce periods for prolonged operation in dusty areas, cold climates, or when short flights and long idle periods result in sludging conditions.

#### **NOTE**

After first 20 to 30 hours of engine operation, an initial oil change should be made to remove "break-in" oil and change the filter, if installed.

**CARBURETOR AIR FILTER** -- Clean or replace. Under extremely dusty conditions, daily maintenance of the filter is recommended.

**NOSE GEAR TORQUE LINKS** -- Lubricate. When operating under dusty conditions, more frequent lubrication is recommended.

### **EACH 100 HOURS**

**SPARK PLUGS** -- Clean, test and regap.

**FUEL STRAINER** -- Disassemble and clean.

**FUEL TANK SUMP DRAIN PLUGS** -- Remove and drain.

**FUEL SELECTOR VALVE DRAIN PLUG** -- Remove and drain.

**SHIMMY DAMPENER** -- Refer to Service Manual for detailed instructions on checking and filling.

**BRAKE MASTER CYLINDERS** -- Check and fill.

**VACUUM SYSTEM OIL SEPARATOR (OPT)** -- Clean.

**SUCTION RELIEF VALVE INLET SCREEN (OPT)** -- Clean.

# **SERVICING INTERVALS CHECK LIST**

**(Continued)**

## **EACH 500 HOURS**

**WHEEL BEARINGS** -- Lubricate at first 100 hours and at 500 hours thereafter. Reduce lubrication interval to 100 hours when operating in dusty or seacoast areas, during periods of extensive taxiing, or when numerous take-offs and landings are made.

**VACUUM SYSTEM AIR FILTER (OPT)** -- Replace filter element. Replace sooner if suction gage reading drops to 4.6 in. Hg.

## **AS REQUIRED**

**NOSE GEAR SHOCK STRUT** -- Keep filled with hydraulic fluid and inflated with air to 55-60 psi.

**OXYGEN CYLINDER** -- The oxygen cylinder must be hydrostatically tested at specific intervals in accordance with Federal Regulations. Refer to Service Manual for detailed instructions.

## OWNER FOLLOW-UP SYSTEM

---



Your Cessna Dealer has an owner follow-up system to notify you when he receives information that applies to your Cessna. In addition, if you wish, you may choose to receive similar notification directly from the Cessna Customer Services Department. A subscription form is supplied in your Owner's Service Policy booklet for your use, should you choose to request this service. Your Cessna Dealer will be glad to supply you with details concerning these follow-up programs, and stands ready through his Service Department to supply you with fast, efficient, low cost service.

### PUBLICATIONS

Various publications and flight operation aids are furnished in the aircraft when delivered from the factory. These items are listed below.

- OWNER'S MANUALS FOR YOUR  
AIRCRAFT  
ELECTRONICS AND AUTOPILOT
- CESSNA FLIGHT GUIDE (FLIGHT COMPUTER)
- SALES AND SERVICE DEALER DIRECTORY
- DO'S AND DON'TS ENGINE BOOKLET

The following additional publications, plus many other supplies that are applicable to your aircraft, are available from your Cessna Dealer.

- SERVICE MANUALS AND PARTS CATALOGS FOR YOUR  
AIRCRAFT  
ENGINE AND ACCESSORIES  
ELECTRONICS AND AUTOPILOT

Your Cessna Dealer has a current catalog of all available Customer Services Supplies, many of which he keeps on hand. If supplies are not in stock, your Cessna Dealer will be happy to order for you.

---



# Section VI

## OPERATIONAL DATA

The operational data charts on the following pages are presented for two purposes; first, so that you may know what to expect from your airplane under various conditions, and second, to enable you to plan your flights in detail and with reasonable accuracy.

The data in the charts has been compiled from actual flight tests with the airplane and engine in good condition and using average piloting techniques. Note also that the range charts make no allowances for wind, navigational errors, warm-up, take-off, climb, etc. You must estimate these variables for yourself and make allowances accordingly. Speeds shown in the Cruise Performance charts reflect performance of the Skylane configuration; these speeds are 2 to 3 MPH faster than the Model 182.

Remember that the charts contained herein are based on standard day conditions. For more precise power, fuel consumption, and endurance information, consult the Cessna Flight Guide (Power Computer) supplied with your aircraft. With the Flight Guide, you can easily take into account temperature variations from standard at any flight altitude.

### AIRSPEED CORRECTION TABLE

FLAPS UP	IAS	60	80	100	120	140	160	180	---
	CAS	68	83	100	118	137	156	175	---
FLAPS DOWN 20° - 40°	IAS	40	50	60	70	80	90	100	110
	CAS	57	62	67	75	84	92	101	110

Figure 6-1.

## STALL SPEEDS, POWER OFF

		ANGLE OF BANK		
CONDITION		0°	30°	60°
2950 LBS. GROSS WEIGHT	FLAPS UP	66	71	93
	FLAPS 20°	59	63	83
	FLAPS 40°	57	61	81

**SPEEDS ARE MPH, CAS**

Figure 6-2.

# TAKE-OFF DATA

## TAKE-OFF DISTANCE WITH 20° FLAPS FROM HARD SURFACE RUNWAY

GROSS WEIGHT LBS.	IAS @ 50' MPH	HEAD WIND KNOTS	AT SEA LEVEL & 59°F.			AT 2500 FT. & 50°F.			AT 5000 FT. & 41°F.			AT 7500 FT. & 32°F.		
			IAS MPH	RATE CLIMB FT/MIN	FUEL USED	IAS MPH	RATE CLIMB FT/MIN	FUEL USED	IAS MPH	RATE CLIMB FT/MIN	FUEL USED	IAS MPH	RATE CLIMB FT/MIN	FUEL USED
2950	63	0	705	1350	845	1025	1245	910	1015	1990	1240	1240	2595	
		10	480	1025	585	725	1350	900	725	1350	900	2040		
		20	310	740	385	590	1150	610	480	1150	610	1545		
2500	58	0	485	965	575	1120	690	1330	690	1330	840	1630		
		10	325	710	395	840	1005	590	475	1005	590	1255		
		20	195	490	245	590	720	380	300	720	380	915		
2000	52	0	295	655	350	745	415	855	415	855	500	1005		
		10	185	480	225	620	425	335	275	620	335	740		
		20	105	305	130	355	160	205	160	425	205	515		

NOTES: 1. Increase distances 10% for each 25°F above standard temperature for particular altitude.  
2. For operation on a dry, grass runway, increase distances (both 'ground run' and 'total to clear 50 ft. obstacle') by 1% of the 'total to clear 50 ft. obstacle' figure.

# MAXIMUM RATE-OF-CLIMB DATA

GROSS WEIGHT LBS.	AT SEA LEVEL & 59°F.			AT 5000 FT. & 41°F.			AT 10,000 FT. & 23°F.			AT 15,000 FT. & 5°F.			AT 20,000 FT. & -12°F.		
	IAS MPH	RATE CLIMB FT/MIN	GAL. FUEL USED	IAS MPH	RATE CLIMB FT/MIN	FUEL USED	IAS MPH	RATE CLIMB FT/MIN	FUEL USED	IAS MPH	RATE CLIMB FT/MIN	FUEL USED	IAS MPH	RATE CLIMB FT/MIN	FUEL USED
2950	89	890	1.5	87	665	3.8	85	445	6.8	83	220	11.5	--	--	--
2500	87	1210	1.5	85	935	3.2	83	655	5.2	80	380	8.2	78	105	14.9
2000	84	1710	1.5	82	1350	2.7	79	995	4.1	76	640	5.9	74	280	9.2

NOTES: 1. Flaps up, full throttle, 2600 RPM, mixture leaned for smooth operation above 5000 ft.  
2. Fuel used includes warm-up and take-off allowance.  
3. For hot weather, decrease rate of climb 30 ft./min. for each 10°F above standard day temperature for particular altitude.

Figure 6-3.

# CRUISE PERFORMANCE

## LEAN MIXTURE

Standard Conditions \ Zero Wind \ Gross Weight- 2950 Pounds

2500 FEET

RPM	MP	% BHP	TAS MPH	GAL/HOUR	60 GAL(NO RESERVE)		79 GAL(NO RESERVE)	
					ENDR. HOURS	RANGE MILES	ENDR. HOURS	RANGE MILES
2450	23	76	156	14.2	4.2	660	5.6	870
	22	72	153	13.4	4.5	685	5.9	900
	21	68	149	12.7	4.7	705	6.2	925
	20	63	144	12.0	5.0	720	6.6	950
2300	23	71	151	13.1	4.6	690	6.0	910
	22	67	148	12.2	4.9	730	6.5	960
	21	62	143	11.5	5.2	745	6.9	980
	20	59	140	11.0	5.5	765	7.2	1005
2200	23	67	148	12.1	5.0	735	6.5	965
	22	63	144	11.4	5.3	760	6.9	1000
	21	59	140	10.8	5.6	780	7.3	1025
	20	55	135	10.2	5.9	795	7.7	1045
*2000	20	47	123	8.7	6.9	850	9.1	1115
	19	43	117	8.2	7.3	855	9.6	1125
	18	39	110	7.5	8.0	880	10.5	1160
	17	35	101	7.0	8.6	865	11.3	1140

\*Power settings in this block represent maximum range settings.

Figure 6-4 (Sheet 1 of 5).

## CRUISE PERFORMANCE

### LEAN MIXTURE

Standard Conditions  $\searrow$  Zero Wind  $\swarrow$  Gross Weight- 2950 Pounds

5000 FEET

RPM	MP	% BHP	TAS MPH	GAL/HOUR	60 GAL(NO RESERVE)		79 GAL(NO RESERVE)	
					ENDR. HOURS	RANGE MILES	ENDR. HOURS	RANGE MILES
2450	23	78	160	14.5	4.1	660	5.4	870
	22	73	157	13.6	4.4	695	5.8	910
	21	70	153	13.0	4.6	705	6.1	930
	20	65	149	12.2	4.9	735	6.5	965
2300	23	73	157	13.4	4.5	705	5.9	925
	22	69	152	12.6	4.8	725	6.3	955
	21	64	148	11.9	5.0	745	6.6	985
	20	60	144	11.2	5.4	770	7.1	1015
2200	23	68	151	12.4	4.8	730	6.4	960
	22	64	148	11.7	5.1	760	6.8	1000
	21	60	144	11.0	5.5	785	7.2	1035
	20	57	139	10.5	5.7	795	7.5	1045
*2000	20	48	128	9.0	6.7	855	8.8	1125
	19	45	121	8.5	7.1	855	9.3	1125
	18	41	114	7.9	7.6	865	10.0	1140
	17	37	105	7.3	8.2	865	10.8	1135

\*Power settings in this block represent maximum range settings.

Figure 6-4 (Sheet 2 of 5).

# CRUISE PERFORMANCE

## LEAN MIXTURE

Standard Conditions \ Zero Wind \ Gross Weight- 2950 Pounds

7500 FEET

RPM	MP	% BHP	TAS MPH	GAL/HOUR	60 GAL(NO RESERVE)		79 GAL(NO RESERVE)	
					ENDR. HOURS	RANGE MILES	ENDR. HOURS	RANGE MILES
2450	21	71	157	13.1	4.6	720	6.0	945
	20	67	154	12.4	4.8	745	6.4	980
	19	62	149	11.7	5.1	765	6.8	1005
	18	58	144	11.0	5.5	785	7.2	1035
2300	21	66	153	12.2	4.9	750	6.5	990
	20	62	149	11.6	5.2	770	6.8	1015
	19	58	144	11.0	5.5	785	7.2	1035
	18	54	139	10.5	5.7	795	7.5	1045
2200	21	62	149	11.4	5.3	785	6.9	1035
	20	58	144	10.7	5.6	805	7.4	1065
	19	54	139	10.2	5.9	820	7.7	1075
	18	51	133	9.7	6.2	825	8.1	1085
*2000	20	50	132	9.2	6.5	860	8.6	1135
	19	47	126	8.7	6.9	870	9.1	1145
	18	43	118	8.1	7.4	875	9.8	1150
	17	39	110	7.6	7.9	870	10.4	1145

\*Power settings in this block represent maximum range settings.

Figure 6-4 (Sheet 3 of 5).

# CRUISE PERFORMANCE

## LEAN MIXTURE

Standard Conditions  $\searrow$  Zero Wind  $\searrow$  Gross Weight- 2950 Pounds  
10,000 FEET

RPM	MP	% BHP	TAS MPH	GAL/HOUR	60 GAL(NO RESERVE)		79 GAL(NO RESERVE)	
					ENDR. HOURS	RANGE MILES	ENDR. HOURS	RANGE MILES
2450	19	63	154	11.9	5.0	775	6.6	1020
	18	60	149	11.2	5.4	800	7.1	1050
	17	55	143	10.6	5.7	810	7.5	1065
	16	51	137	10.0	6.0	820	7.9	1080
2300	19	60	149	11.1	5.4	805	7.1	1060
	18	56	144	10.5	5.7	825	7.5	1085
	17	51	137	9.8	6.1	840	8.1	1105
	16	47	130	9.2	6.5	850	8.6	1115
2200	19	56	144	10.4	5.8	830	7.6	1095
	18	52	138	9.8	6.1	845	8.1	1110
	17	49	132	9.3	6.5	850	8.5	1120
	16	45	124	8.7	6.9	855	9.1	1125
*2000	19	48	130	8.9	6.7	875	8.9	1155
	18	44	123	8.4	7.1	880	9.4	1155
	17	40	115	7.8	7.7	885	10.1	1165
	16	38	101	7.4	8.1	820	10.7	1080

\*Power settings in this block represent maximum range settings.

Figure 6-4 (Sheet 4 of 5).

# CRUISE PERFORMANCE

## LEAN MIXTURE

Standard Conditions \ Zero Wind \ Gross Weight- 2950 Pounds

15,000 FEET

RPM	MP	% BHP	TAS MPH	GAL/HOUR	60 GAL(NO RESERVE)		79 GAL(NO RESERVE)	
					ENDR. HOURS	RANGE MILES	ENDR. HOURS	RANGE MILES
2450	16	54	145	10.4	5.8	835	7.6	1100
	15	50	139	9.8	6.1	850	8.1	1120
	14	46	126	9.2	6.5	820	8.6	1080
2300	16	50	139	9.6	6.2	870	8.2	1145
	15	47	131	9.1	6.6	865	8.7	1135
	14	42	113	8.5	7.1	800	9.3	1050
2200	16	47	131	9.1	6.6	865	8.7	1135
	15	44	120	8.6	7.0	835	9.2	1100
	14	40	106	8.0	7.5	795	9.9	1045
2000	16	40	106	7.8	7.7	815	10.1	1075
	15	37	97	7.3	8.2	795	10.8	1050

Figure 6-4 (Sheet 5 of 5).



# LANDING DISTANCE TABLE

## LANDING DISTANCE WITH 40° FLAPS ON HARD SURFACED RUNWAY

GROSS WEIGHT POUNDS	APPROACH IAS MPH	@ SEA LEVEL & 59° F		@ 2500 FEET & 50° F		@ 5000 FEET & 41° F		@ 7500 FEET & 32° F	
		GROUND ROLL	TOTAL TO CLEAR 50 FT. OBS.	GROUND ROLL	TOTAL TO CLEAR 50 FT. OBS.	GROUND ROLL	TOTAL TO CLEAR 50 FT. OBS.	GROUND ROLL	TOTAL TO CLEAR 50 FT. OBS.
2800	69	590	1350	640	1430	680	1505	740	1595

- NOTES: 1. Distances shown are based on zero wind, power off and heavy braking.  
 2. Reduce landing distances 10% for each 5 knots headwind.  
 3. For operation on a dry, grass runway, increase distances (both "ground roll" and "total to clear 50 ft. obstacle") by 20% of the "total to clear 50 ft. obstacle" figure.

Figure 6-5.

## MAXIMUM GLIDE

- SPEED 80 MPH (IAS) —
- PROPELLER WINDMILLING
- FLAPS UP ● ZERO WIND

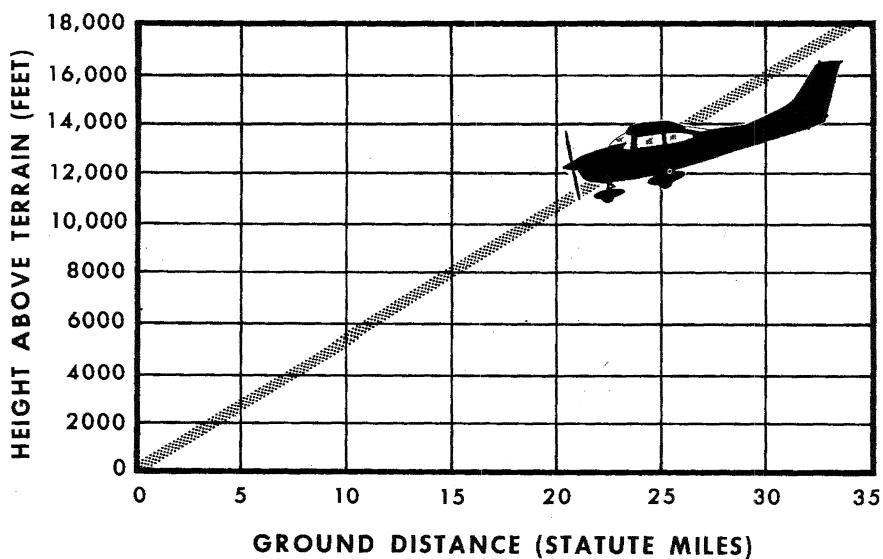


Figure 6-6.

# *Section VII*

## **OPTIONAL SYSTEMS**

This section contains a description, operating procedures, and performance data (when applicable) for some of the optional equipment which may be installed in your Cessna. Owner's Manual Supplements are provided to cover operation of other optional equipment systems when installed in your airplane. Contact your Cessna Dealer for a complete list of available optional equipment.

### **LONG RANGE FUEL TANKS**

Special wings with long range fuel tanks are available to replace the standard wings and fuel tanks for greater endurance and range. When these tanks are installed, the total usable fuel, for all flight conditions, is 79 gallons.

### **COLD WEATHER EQUIPMENT**

#### **WINTERIZATION KIT AND NON-CONGEALING OIL COOLER.**

For continuous operation in temperatures consistently below 20°F, the Cessna winterization kit and non-congealing oil cooler should be installed to improve engine operation. The winterization kit consists of two shields to partially cover the cowl nose cap opening, one shield to cover the carburetor air intake, and insulation for the crankcase breather line. Once installed, the crankcase breather insulation is approved for permanent use in both cold and hot weather. The non-congealing oil cooler replaces the standard oil cooler and provides improved oil flow through the cooler in cold weather.

## GROUND SERVICE PLUG RECEPTACLE.

A ground service plug receptacle may be installed to permit use of an external power source for cold weather starting and during lengthy maintenance work on the airplane electrical system (with the exception of electronic equipment).

### NOTE

Electrical power for the airplane electrical circuits is provided through a split bus bar having all electronic circuits on one side of the bus and other electrical circuits on the other side of the bus. When an external power source is connected, a contactor automatically opens the circuit to the electronic portion of the split bus bar as a protection against damage to the transistors in the electronic equipment by transient voltages from the power source. Therefore, the external power source can not be used as a source of power when checking electronic components.

Just before connecting an external power source (generator type or battery cart), the master switch should be turned "ON."

The ground service plug receptacle circuit incorporates a polarity reversal protection. Power from the external power source will flow only if the ground service plug is correctly connected to the airplane. If the plug is accidentally connected backwards, no power will flow to the airplane's electrical system, thereby preventing any damage to electrical equipment.

The battery and external power circuits have been designed to completely eliminate the need to "jumper" across the battery contactor to close it for charging a completely "dead" battery. A special fused circuit in the external power system supplies the needed "jumper" across the contacts so that with a "dead" battery and an external power source applied, turning the master switch "ON" will close the battery contactor.

## OIL DILUTION SYSTEM.

If your airplane is equipped with oil dilution, and very low temperatures are anticipated, dilute oil prior to engine shutdown by energizing the oil dilution switch with the engine operating at 1000 RPM. (Refer to figure 7-1 for dilution time for the anticipated temperature.) While diluting oil, the oil pressure should be watched for any unusual fluctuations that might indicate a screen being clogged with sludge washed down by the fuel.

OIL DILUTION TABLE			
TEMPERATURE			
	0°F	-10°F	-20°F
Dilution Time .....	1½ min.	3¾ min.	6 min.
Fuel Added .....	1 qt.	2½ qt.	4 qt.
NOTE: Maximum fuel and oil in sump for take-off is 13 quarts.			

Figure 7-1.

NOTE

On the first operation of the oil dilution system each season, use the full dilution period, drain the oil, clean the screen, refill with new oil and redilute as required.

If the full dilution time was used, beginning with a full oil sump (12 quarts), subsequent starts and engine warm-up should be prolonged to evaporate enough of the fuel to lower the oil sump level to 13 quarts prior to take-off. Otherwise, the sump may overflow when the airplane is in a climb attitude.

To avoid progressive dilution of the oil, flights of at least two hours' duration should be made between oil dilution operations.

## STATIC PRESSURE ALTERNATE SOURCE VALVE.

A static pressure alternate source valve is available to provide continued operation of the airspeed indicator, altimeter and vertical speed indicator in the event that the static system ports or lines become obstructed.

If erroneous instrument readings are suspected due to water or ice in the static system ports or lines, the static pressure alternate source valve knob should be pulled on, venting the static system to the cabin. However, cabin pressures will vary with open cabin ventilators or windows. The most adverse combinations will result in airspeed and altimeter variations of no more than 6 MPH and 50 feet respectively.

In climb and cruising flight, the airspeed and altimeter will read high. However, in the landing approach (when instrument readings are more important) the instruments will generally read low. Therefore, using the normal published approach speeds and altitudes will result in a slightly faster approach speed and higher approach path than normal, giving an extra margin of safety.

## STATIC DISCHARGERS

If frequent IFR flights are planned, installation of optional wick-type static dischargers is recommended to improve radio communications, during flight through dust or various forms of precipitation (rain, freezing rain, snow or ice crystals). Under these conditions, the build up and discharge of static electricity from the trailing edges of the wings, rudder, elevators, propeller tips and radio antennas, can result in loss of usable radio signals on all communications and navigation radio equipment. (Usually the ADF is first to be affected and VHF communication equipment is the last to be affected).

Installation of static dischargers reduces interference from precipitation static, but it is possible to encounter severe precipitation static conditions which might cause the loss of radio signals, even with static dischargers installed. Whenever possible, avoid known severe precipitation areas to prevent loss of dependable radio signals. If avoidance is impractical, minimize airspeed and anticipate temporary loss of radio signals while in these areas.

## RADIO SELECTOR SWITCHES

### RADIO SELECTOR SWITCH OPERATION.

Operation of the radio equipment is normal as covered in the respective radio manuals. When more than one radio is installed, an audio switching system is necessary. The operation of this switching system is described below.

### TRANSMITTER SELECTOR SWITCH.

The transmitter selector switch has two positions. When two transmitters are installed, it is necessary to switch the microphone to the radio unit the pilot desires to use for transmission. This is accomplished by placing the transmitter selector switch in the position corresponding to the radio unit which is to be used. The up position selects the upper transmitter and the down position selects the lower transmitter.

The installation of Cessna radio equipment provides certain audio

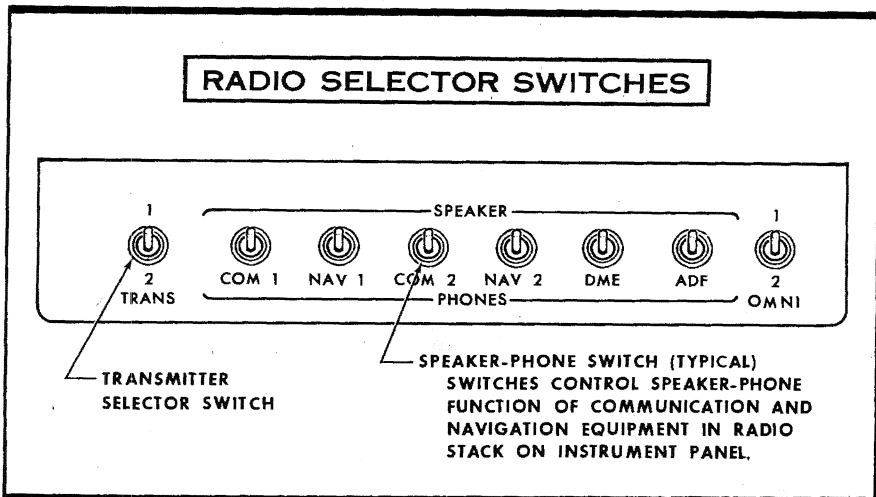


Figure 7-2.

back-up capabilities and transmitter selector switch functions that the pilot should be familiar with. When the transmitter selector switch is placed in position 1 or 2, the audio amplifier of the corresponding transceiver is utilized to provide the speaker audio for all radios. If the audio amplifier in the selected transceiver fails, as evidenced by loss of speaker audio for all radios, place the transmitter selector switch in the other transceiver position. Since an audio amplifier is not utilized for headphones, a malfunctioning amplifier will not affect headphone operation.

## **SPEAKER-PHONE SWITCHES.**

The speaker-phone switches determine whether the output of the receiver in use is fed to the headphones or through the audio amplifier to the speaker. Place the switch for the desired receiving system either in the up position for speaker operation or in the down position for headphones.

## **AUTOPILOT-OMNI SWITCH.**

When a Nav-O-Matic autopilot is installed with two compatible omni receivers, an autopilot-omni switch is utilized. This switch selects the omni receiver to be used for the omni course sensing function of the autopilot. The up position selects the upper omni receiver in the radio panel stack and the down position selects the lower omni receiver.

# **BOOM MICROPHONE**

A boom microphone may be mounted near the upper left corner of the windshield. Use of the boom microphone allows radio communication without the necessity of releasing any controls to handle the normal hand microphone. The microphone keying switch is a push button located on the left side of the pilot's control wheel.



## OXYGEN SYSTEM

A four-place oxygen system is available for your airplane. In this system, an oxygen cylinder, located behind the rear baggage compartment wall, supplies the oxygen. Cylinder pressure is reduced to an operating pressure of 70 psi by a pressure regulator attached to the cylinder. A shutoff valve is included as part of the regulator assembly. An oxygen cylinder filler valve is located on the left side of the rear baggage compartment wall. Cylinder pressure is indicated by a pressure gage located in the overhead oxygen console.

Four oxygen outlets are provided; two in the overhead oxygen console and two in the cabin ceiling just above the side windows; one at each of the seating positions. One permanent, microphone equipped mask is provided for the pilot, and three disposable type masks are provided for the passengers. All masks are the partial-rebreathing type equipped with vinyl plastic hoses and flow indicators.


A remote shutoff valve control, located adjacent to the pilot's oxygen outlet, is used to shut off the supply of oxygen to the system when not in use. The control is mechanically connected to the shutoff valve at the cylinder. With the exception of the shutoff function, the system is completely automatic and requires no manual regulation for change of altitude.

### OXYGEN SYSTEM OPERATION.

Prior to flight, check to be sure that there is an adequate oxygen supply for the trip, by noting the oxygen pressure gage reading. Refer to paragraph OXYGEN DURATION CALCULATION, and to the Oxygen Duration Chart (figure 7-3). Also, check that the face masks and hoses are accessible and in good condition.

Supplemental oxygen should be used by all occupants when cruising above 10,000 feet. As described in the Cessna booklet "Man At Altitude," it is often advisable to use oxygen at altitudes lower than 10,000 feet under conditions of night flying, fatigue, or periods of physiological or emotional disturbances. Also, the habitual and excessive use of tobacco or alcohol will usually necessitate the use of oxygen at less than 10,000 feet.

## OXYGEN DURATION CHART (48 CUBIC FEET CAPACITY)

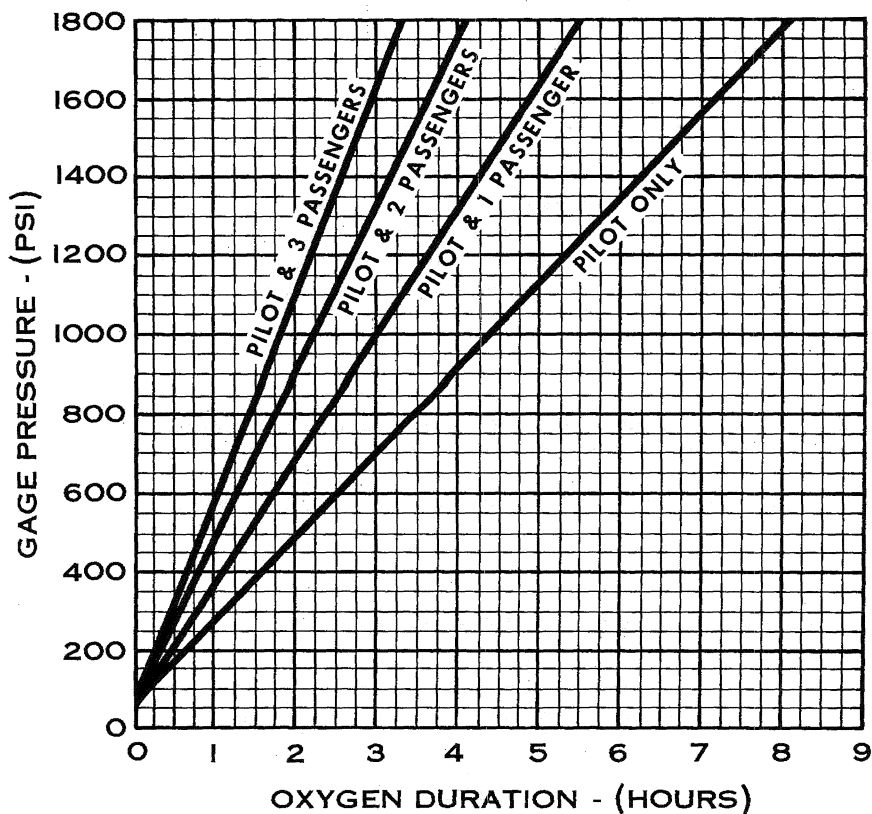

NOTE: This chart is based on a pilot with an orange color-coded oxygen line fitting and passengers with green color-coded line fittings.

Figure 7-3.

#### NOTE

For safety reasons, no smoking should be allowed in the aircraft while oxygen is being used.

When ready to use the oxygen system, proceed as follows:

- (1) Select mask and hose.

#### NOTE

The hose assembly provided for the pilot is of a higher flow rate than those for the passengers; it is color-coded with an orange band adjacent to the plug-in fitting. The hoses provided for the passengers are color-coded with a green band. If the aircraft owner prefers, he may provide higher flow rate hoses for all passengers. In any case, it is recommended that the pilot use the larger capacity hose. The pilot's mask is equipped with a microphone to facilitate the use of the radio while using oxygen. A microphone adapter cord is provided to allow the pilot to utilize an oxygen mask microphone in aircraft that are equipped with the optional boom microphone. To connect the oxygen mask microphone to the "AUX MIKE" jack, located under the lower left edge of the instrument panel, disconnect the boom mike lead from the "AUX MIKE" jack, connect the mask lead to the adapter cord and plug the adapter cord into the "AUX MIKE" jack. A switch is incorporated on the left hand control wheel to operate the microphone.

- (2) Attach mask to face and adjust metallic nose strap for snug mask fit.
- (3) Select oxygen outlet located nearest to the seat you are occupying, and plug delivery hose into it. When the oxygen supply is turned on, oxygen will flow continuously at the proper rate of flow for any altitude without any manual adjustments.
- (4) Position oxygen supply control knob "ON."
- (5) Check the flow indicator in the face mask hose. Oxygen is flowing if the indicator is being forced toward the mask.
- (6) Unplug the delivery hose from the outlet coupling when discontinuing use of oxygen system. This automatically stops the flow of oxygen.
- (7) Position oxygen supply control knob "OFF."

## OXYGEN DURATION CALCULATION.

The Oxygen Duration Chart (figure 7-3) should be used in determining the usable duration (in hours) of the oxygen supply in your airplane. The following procedure outlines the method of finding the duration from the chart.

- (1) Note the available oxygen pressure shown on the pressure gage.
- (2) Locate this pressure on the scale on the left side of the chart, then go across the chart horizontally to the right until you intersect the line representing the number of persons making the flight. After intersecting the line, drop down vertically to the bottom of the chart and read the duration in hours given on the scale.
- (3) As an example of the above procedure, 1400 psi of pressure will safely sustain the pilot only for nearly 6 hours and 15 minutes. The same pressure will sustain the pilot and three passengers for approximately 2 hours and 30 minutes.

### NOTE

The Oxygen Duration Chart is based on a standard configuration oxygen system having one orange color-coded hose assembly for the pilot and green color-coded hoses for the passengers. If orange color-coded hoses are provided for pilot and passengers, it will be necessary to compute new oxygen duration figures due to the greater consumption of oxygen with these hoses. This is accomplished by computing the total duration available to the pilot only (from "PILOT ONLY" line on chart), then dividing this duration by the number of persons (pilot and passengers) using oxygen.

## OXYGEN SYSTEM SERVICING.

The oxygen cylinder, when fully charged, contains approximately 48 cubic feet of oxygen, under a pressure of 1800 psi at 70°F. Filling pressures will vary, however, due to the ambient temperature in the filling area, and because of the temperature rise resulting from compression of the oxygen. Because of this, merely filling to 1800 psi will not result in a properly filled cylinder. Fill to the pressures indicated in the table on the following page for ambient temperature.

### IMPORTANT

Oil, grease, or other lubricants in contact with oxygen create a serious fire hazard, and such contact must be avoided when handling oxygen equipment.

AMBIENT TEMPERATURE °F	FILLING PRESSURE PSIG	AMBIENT TEMPERATURE °F	FILLING PRESSURE PSIG
0	1600	50	1825
10	1650	60	1875
20	1700	70	1925
30	1725	80	1975
40	1775	90	2000

## TRUE AIRSPEED INDICATOR

A true airspeed indicator is available to replace the standard airspeed indicator in your airplane. The true airspeed indicator has a calibrated rotatable ring which works in conjunction with the airspeed indicator dial in a manner similar to the operation of a flight computer.

TO OBTAIN TRUE AIRSPEED, rotate ring until pressure altitude is aligned with outside air temperature in degrees Fahrenheit. Then read true airspeed on rotatable ring opposite airspeed needle.

### NOTE

Pressure altitude should not be confused with indicated altitude. To obtain pressure altitude, set barometric scale on altimeter to "29.92" and read pressure altitude on altimeter. Be sure to return altimeter barometric scale to original barometric setting after pressure altitude has been obtained.

# CESSNA ECONOMY MIXTURE INDICATOR

The Cessna Economy Mixture Indicator is an exhaust gas temperature (EGT) sensing device which visually aids the pilot in obtaining either an efficient maximum power mixture or a desired cruise mixture. Exhaust gas temperature varies with cylinder fuel-to-air ratio, power, and RPM.

## OPERATING INSTRUCTIONS.

The reference EGT must be known before the EGT indicator can be used for take-off and climb. Determine the reference EGT periodically as follows:

- (1) Establish 65% power in level flight at 2450 RPM and part throttle.
- (2) Carefully lean to peak EGT. This is the reference EGT.

FLIGHT CONDITION	POWER SETTING	EGT	REMARKS
TAKE-OFF AND CLIMB	Full throttle and 2600 RPM	200° richer than REFERENCE EGT	Use FULL RICH mixture below 3000'
NORMAL CLIMB	23" MP and 2450 RPM	125° richer than REFERENCE EGT	Above 10,000' use BEST POWER mixture
MAXIMUM CRUISE SPEED	75% or less	Peak minus 125° F (ENRICHEN)	BEST POWER mixture, 1 MPH TAS increase and 10% range loss from NORMAL LEAN
NORMAL CRUISE	75% or less	Peak minus 75° (ENRICHEN)	NORMAL LEAN mixture-Owner's Manual and Power Computer performance
MAXIMUM RANGE	65% or less	Peak minus 25° (ENRICHEN)	2 MPH TAS loss and 10% range increase from NORMAL LEAN

#### NOTE

Operation at peak EGT is not authorized for continuous operation, except to establish peak EGT for reference at 75% power or less. Operation on the lean side of peak EGT or within 25° of peak EGT is not approved.

The chart of page 7-12 should be used to establish mixture settings in take-off, climb and cruise conditions.

The yellow index pointer may be set at the reference point, or to a specific point to lean to. It can be positioned manually by turning the screw adjustment on the face of the instrument.

For maximum performance take-off, mixture may be set during static full power run-up, if feasible, or during the ground roll.

#### NOTE

Enrichen mixture during climb if excessive cylinder head temperatures occur.

When leaning the mixture under some cruise conditions, engine roughness may occur before peak EGT is reached. In this case, use the EGT corresponding to the onset of roughness as the reference point instead of peak EGT.

Changes in altitude or power setting require the EGT to be rechecked. Mixture may be controlled in cruise descent by simply enriching to avoid engine roughness. During prolonged descents, maintain sufficient power to keep the EGT needle on scale. In idle descents or landing approaches use full rich mixture. For idle descents or landing approaches at high elevations, the mixture control may be set in a position to permit smooth engine acceleration to maximum power.

## WING LEVELER

A wing leveler may be installed to augment the lateral stability of the airplane. The system uses the Turn Coordinator for roll and yaw sensing. Vacuum pressure, from the engine-driven vacuum pump, is routed from the Turn Coordinator to cylinder-piston servo units attached to the aileron control system. As the airplane deviates from a wing level attitude, vacuum pressure in the servo units is increased or relieved as needed to actuate the ailerons to oppose the deviations.

A separately mounted push-pull control knob, labeled "WING LVLR", is provided on the left side of the instrument panel to turn the system on and off. A "ROLL TRIM" control knob on the Turn Coordinator is used for manual roll trim control to compensate for asymmetrical loading of fuel and passengers, and to optimize system performance in climb, cruise and let-down.

### OPERATING CHECK LIST

#### TAKE-OFF.

- (1) "WING LVLR" Control Knob -- Check in off position (full in).

#### CLIMB.

- (1) Adjust elevator and rudder trim for climb.
- (2) "WING LVLR" Control Knob -- Pull control knob "ON."
- (3) "ROLL TRIM" Control Knob -- Adjust for wings level attitude.

#### CRUISE.

- (1) Adjust power and elevator and rudder trim for level flight.
- (2) "ROLL TRIM" Control Knob -- Adjust as desired.

#### DESCENT.

- (1) Adjust power and elevator and rudder trim for desired speed and rate of descent.
- (2) "ROLL TRIM" Control Knob -- Adjust as desired.



## **LANDING.**

- (1) Before landing, push "WING LVLRL" control knob full in to the off position.

## **EMERGENCY PROCEDURES**

If a malfunction should occur, the system is easily overpowered with pressure on the control wheel. The system should then be turned off. In the event of partial or complete vacuum failure, the wing leveler will automatically become inoperative. However, the Turn Coordinator used with the wing leveler system will not be affected by loss of vacuum since it is designed with a "back-up" system enabling it to operate from either vacuum or electrical power in the event of failure of one of these sources.

## **OPERATING NOTES**

- (1) The wing leveler system may be overpowered at any time without damage or wear. However, for extended periods of maneuvering it may be desirable to turn the system off.
- (2) It is recommended that the system not be engaged during take-off and landing. Although the system can be easily overpowered, servo forces could significantly alter the manual "feel" of the aileron control, especially should a malfunction occur.

## **FUEL TANK QUICK-DRAIN VALVE KIT**

Two fuel tank quick-drain valves and a fuel sampler cup are available as a kit to facilitate daily draining and inspection of fuel in the main tanks for the presence of water and sediment. The valves replace existing fuel tank drain plugs located at the lower inboard area of the wing. The fuel sampler cup, which may be stowed in the map compartment, is used to drain the valves. The sampler cup has a probe in the center of the cup. When the probe is inserted into the hole in the bottom of the drain valve and pushed upward, fuel flows into the cup to facilitate visual inspection of the fuel. As the cup is removed, the drain valve seats, stopping the flow of fuel.

## OIL QUICK-DRAIN VALVE

An oil quick-drain valve is optionally offered to replace the drain plug in the oil sump drain port. The valve provides a quicker and cleaner method of draining engine oil. To drain the oil with this valve installed, slip a hose over the end of the valve, route the hose to a suitable container, then push upward on the end of the valve until it snaps into the open position. Spring clips will hold the valve open. After draining, use a screwdriver or suitable tool to snap the valve into the extended (closed) position and remove the drain hose.

## CARBURETOR AIR TEMPERATURE GAGE

A carburetor air temperature gage may be installed in the airplane to help detect carburetor icing conditions. The gage is marked with a yellow arc between  $-15^{\circ}$  and  $+5^{\circ}\text{C}$ . The yellow arc indicates the carburetor temperature range where carburetor icing can occur; a placard on the gage reads "KEEP NEEDLE OUT OF YELLOW ARC DURING POSSIBLE ICING CONDITIONS."

Visible moisture or high humidity can cause carburetor ice formation, especially in idle or low power conditions. Under cruising conditions, the formation of ice is usually slow, providing time to detect the loss of manifold pressure caused by the ice. Carburetor icing during take-off is rare since the full-open throttle condition is less susceptible to ice obstruction.

If the carburetor air temperature gage needle moves into the yellow arc during potential carburetor icing conditions, or there is an unexplained drop in manifold pressure, apply full carburetor heat. Upon regaining the original manifold pressure (with heat off), determine by trial and error the minimum amount of carburetor heat required for ice-free operation.

### NOTE

Carburetor heat should not be applied during take-off unless absolutely necessary to obtain smooth engine acceleration (usually in sub-zero temperatures).

# ALPHABETICAL INDEX

---

## A

After Landing, 1-7  
Air Filter,  
    carburetor, 5-10  
    vacuum system, 5-11  
Aircraft File, 5-6  
Airplane Mooring, 5-1  
Airspeed Correction Table, 6-1  
Airspeed Indicator Markings, 4-2  
Airspeed Indicator, True, 7-11  
Airspeed Limitations, 4-2  
Alternator, 2-4  
    check, 2-10  
Aluminum Surfaces, 5-2  
Ammeter, 1-8, 2-3, 2-4  
Authorized Operations, 4-1  
Autopilot-Omni Switch, 7-6

## B

Baggage, Weight, inside front cover  
Battery, 2-4, 5-10  
Battery Contactor, 2-4  
Beacon, Flashing, 2-5  
Before Entering Airplane, 1-1  
Before Landing, 1-6  
Before Starting Engine, 1-1  
Before Take-Off, 1-4, 2-10  
Brake Handle, Parking, 1-8  
Brake Master Cylinders, 5-10

## C

Cabin Heat and Cabin Air Control  
    Knobs, 1-8  
Cabin Heating, Ventilating and  
    Defrosting System, 2-7  
Capacity, Fuel/Oil, inside covers  
Carburetor, 2-2  
Carburetor Air Filter, 5-10

Carburetor Air Temperature Gage,  
    1-8, 4-3, 7-16  
Care,  
    interior, 5-4  
    propeller, 5-3  
Center of Gravity Moment  
    Envelope, 4-7  
Cigar Lighter, 1-8, 2-4  
Circuit Breakers and Fuses, 1-8,  
    2-3, 2-4  
Climb, 1-5, 2-12  
    data, 6-3  
    maximum performance, 1-5  
    normal, 1-5  
Clock, 2-4  
Cold Weather Equipment, 7-1  
Cold Weather Operation, 2-14  
    starting, 2-14  
Compartment, Map, 1-8  
Control Wheel Map Light, 2-6  
Correction Table, Airspeed, 6-1  
Cowl Flap Control Handle, 1-8  
Cruise Performance, 6-4, 6-5,  
    6-6, 6-7, 6-8  
Cruising, 1-6, 2-12  
Cylinder Head Temperature Gage,  
    1-8, 4-3

## D

Data,  
    climb, 6-3  
    cruise, 2-12, 6-4, 6-5, 6-6,  
        6-7, 6-8  
    landing, 6-9  
    take-off, 6-3  
Defroster Control Knob, 1-8  
Diagram,  
    electrical system, 2-4  
    exterior inspection, 1-2  
    fuel, 2-2

- principal dimensions, ii
- taxiing, 2-9
- Dilution System, Oil, 7-2
- Dimensions, Principal, ii
- Dipstick, Oil, 5-9
- Disorientation In Clouds, 3-4
  - emergency let-downs through clouds, 3-5
  - executing a 180° turn in clouds, 3-5
  - recovery from spiral dive, 3-6
- Drain Plug, Fuel Selector, 5-10
- Drain Plugs, Fuel Tank Sump, 5-10

## E

- Economy Mixture Indicator, 1-8, 7-12
  - operating instructions, 7-12
- Electrical Power Supply System Malfunctions, 3-1
  - excessive rate of charge, 3-1
  - insufficient rate of charge, 3-2
- Electrical System, 2-3
  - alternator, 2-4
  - ammeter, 2-3, 2-4
  - battery, 2-4, 5-10
  - battery contactor, 2-4
  - cigar lighter, 2-4
  - circuit breakers and fuses, 2-3, 2-4
  - clock, 2-4
  - flashing beacon, 2-5
  - ground service plug receptacle, 2-4, 7-2
  - magnetos, 2-4
  - master switch, 2-3, 2-4
  - regulator, 2-4
  - reverse polarity contactor, 2-4
  - schematic, 2-4
  - split bus contactor, 2-4
  - starter, 2-4
  - starter contactor, 2-4

- switches, 1-8, 2-4
- Electroluminescent Lighting, 2-5
- Elevator Trim Control Wheel, 1-8
- Emergency Landing without Engine Power, 3-3
- Emergency Let-Downs Through Clouds, 3-5
- Empty Weight, inside front cover
- Engine, inside front cover
  - before starting, 1-1
  - instrument markings, 4-2
  - oil, 5-10, inside back cover
  - oil dipstick, 5-9
  - oil filler, 5-8
  - oil filter, 5-10
  - oil screen, 5-10
  - operation limitations, 4-2
  - primer, 2-2
  - starting, 1-4, 2-8, 2-14
- Engine Instrument Markings, 4-2
- Excessive Rate of Electrical Charge, 3-1
- Executing 180° Turn in Clouds, 3-5
- Exterior Inspection Diagram, 1-2

## F

- File, Aircraft, 5-6
- Filler, Oil, 5-8
- Filter, Oil, 5-10
- Fires, 3-6
  - electrical fire in flight, 3-7
  - engine fire during start on ground, 3-6
  - engine fire in flight, 3-7
- Flashing Beacon, 2-5
- Flight Hour Recorder, 1-8, 2-4
- Flight in Icing Conditions, 3-8
- Flyable Storage, 5-4
- Forced Landings, 3-3
  - ditching, 3-4
  - emergency landing without engine power, 3-3
  - precautionary landing with

engine power, 3-3  
 Fuel Quantity Indicators, 1-8, 4-3  
 Fuel System, 2-1  
     capacity, inside covers  
     carburetor, 2-2  
     fuel quantity indicators, 4-3  
     mixture control knob, 1-8, 2-2  
     primer, 2-2  
     quick-drain valve kit, 7-15  
     schematic, 2-2  
     selector valve, 2-2  
     selector valve handle, 1-8  
     strainer, 2-2, 5-8, 5-10  
     tank fillers, 5-8  
     tank sump drains, 5-10  
     throttle, 1-8, 2-2  
     wing tanks, 2-2, 7-1  
 Fuel Tanks, Long Range, 7-1  
 Fuses and Circuit Breakers, 2-3,  
     2-4

## G

Glare Shield Mounted Lights, 2-6  
 Glide, Maximum, 6-10  
 Graph, Loading, 4-6  
 Gross Weight, inside front cover  
 Ground Handling, 5-1  
 Ground Service Plug Receptacle,  
     2-4, 7-2

## H

Heating, Ventilating and Defrosting  
     System, 2-7  
 Hot Weather Operation, 2-17  
 Hydraulic Fluid, inside back cover

## I

Ignition-Starter Switch, 1-8, 2-4  
 Inspection Diagram, Exterior, 1-2  
 Inspection Service - Inspection  
     Periods, 5-5

Instrument and Control Panel  
     Lighting, 2-5  
 Instrument Markings, Engine, 4-2  
 Instrument Panel, 1-8  
 Interior Care, 5-4

## L

Landing, inside front cover, 2-14  
     after, 1-7  
     balked (go-around), 2-14  
     before, 1-6  
     crosswind, 2-14  
     distance table, 6-9  
     normal, 1-6, 2-14  
     short field, 2-14  
 Let-Down, 1-6  
 Lighting  
     instrument/control panel, 2-5  
 Limitations, Airspeed, 4-2  
 Limitations, Engine Operation, 4-2  
 Loading Graph, 4-6  
 Loading Problem Sample, 4-5  
 Long Range Fuel Tanks, 7-1  
 Lubrication and Servicing  
     Procedures, 5-8

## M

MAA Plate/Finish and Trim Plate,  
     5-7  
 Magnetos, 2-4  
 Maneuvers, Normal Category, 4-1  
 Manifold Pressure Gage, 1-8, 4-3  
 Map Compartment, 1-8  
 Marker Beacon Indicator Lights  
     and Switches, 1-8  
 Master Cylinders, Brake, 5-10  
 Master Switch, 1-8, 2-3, 2-4  
 Maximum Cruise Speed Perfor-  
     mance, 2-12  
 Maximum Glide, 6-10  
 Maximum Performance Climb, 1-5  
 Maximum Performance Take-Off,

1-5  
 Maximum Rate-of-Climb Data, 6-3  
 Microphone, 1-8  
 Mixture Control Knob, 1-8, 2-2  
 Mixture Indicator, Economy, 7-12  
     operating instructions, 7-12  
 Moment Envelope, Center of  
     Gravity, 4-7  
 Mooring Your Airplane, 5-1

## N

Non-Congeaing Oil Cooler, 7-1  
 Normal Category Maneuvers, 4-1  
 Normal Climb, 1-5  
 Normal Landing, 1-6  
 Normal Take-Off, 1-5  
 Nose Gear Shock Strut, 5-11, in-  
     side back cover  
 Nose Gear Torque Links, 5-10

## O

Oil System,  
     capacity, inside covers  
     dilution system, 7-2  
     dilution table, 7-3  
     oil, 5-8, 5-10, inside back  
         cover  
     oil cooler, non-congealing, 7-1  
     oil dipstick, 5-9  
     oil filler, 5-8  
     oil filter, 5-10  
     oil pressure gage, 1-8, 3-3  
     oil quick-drain valve, 7-16  
     oil temperature gage, 1-8, 4-2  
 Operation, Cold Weather, 2-14  
 Operation, Hot Weather, 2-17  
 Operation Limitations, Engine, 4-2  
 Operations, Authorized, 4-1  
 Overhead Console Lights, 2-6  
 Owner Follow-Up System, 5-12  
 Oxygen System, 7-7  
     cylinder, 5-11

duration calculation, 7-10  
 duration chart, 7-8  
 filler valve, 5-9  
 operation, 7-7  
 servicing, 7-10, inside back  
     cover

## P

Painted Surfaces, 5-3  
 Parking Brake Handle, 1-8  
 Performance, Cruise, 6-4, 6-5,  
     6-6, 6-7, 6-8  
 Performance-Specifications, inside  
     front cover  
 Post Lights, 2-5  
 Power Loading, inside front cover  
 Precautionary Landing with En-  
     gine Power, 3-3  
 Primer, Engine, 1-8, 2-2  
 Principal Dimensions, ii  
 Propeller, inside front cover  
     care, 5-3  
 Propeller Control Knob, 1-8

## R

Radios and Autopilot, 1-8  
 Radio Selector Switches, 1-8, 7-5  
     autopilot-omni switch, 7-6  
     operation, 7-6  
     speaker-phone switches, 7-6  
     transmitter selector switch,  
         7-5  
 Range, inside front cover  
 Rate of Climb, inside front cover  
     data, 6-3  
 Rear View Mirror, 1-8  
 Regulator, 2-4  
 Reverse Polarity Contactor, 2-4  
 Rough Engine Operation Or Loss of  
     Power, 3-2  
     low oil pressure, 3-3  
     magneto malfunction, 3-2

spark plug fouling, 3-2  
Rudder Trim Control Wheel, 1-8

## S

Sample Loading Problem, 4-5  
Securing Aircraft, 1-7  
Selector Valve, Fuel, 2-2  
Service Ceiling, inside front cover  
Servicing and Lubrication  
    Procedures, 5-8  
Servicing Intervals Check List,  
    5-10  
Servicing Requirements, inside  
    back cover  
Shimmy Dampener, 5-10  
Shoulder Harnesses, 2-7  
Spark Plugs, 5-10  
Speaker-Phone Switches, 7-5, 7-6  
Speed, inside front cover  
Spins, 2-13  
Split Bus Contactor, 2-4  
Stalls, 2-13  
Stall Speeds, 6-2  
Starter, 2-4  
Starter Contactor, 2-4  
Starting Engine, 1-4, 2-8, 2-14  
Static Pressure Alternate Source  
    Valve, 1-8, 7-3  
Storage, Flyable, 5-4  
Strainer, Fuel, 2-2, 5-8, 5-10  
Strobe Lights, 2-5  
Suction Relief Valve Inlet Screen,  
    5-10  
Sump Drain Plugs, Fuel Tank, 5-10  
Surfaces,  
    aluminum, 5-2  
    painted, 5-3  
System,  
    electrical, 2-3  
    fuel, 2-1  
heating, ventilating and  
defrosting, 2-7

oil dilution, 7-2  
owner, follow-up, 5-12  
oxygen, 7-7

## T

Tachometer, 1-8, 4-3  
Take-Off, inside front cover, 1-5  
    2-11  
    before, 1-4, 2-10  
    data, 6-3  
    maximum performance, 1-5  
    normal, 1-5  
Taxiing, 2-10  
    diagram, 2-9  
Throttle, 1-8, 2-2  
Tie-Down Procedure, 5-1  
Tire Pressures, inside back cover  
Transmitter Selector Switch, 7-5  
Transponder, 1-8  
True Airspeed Indicator, 7-11

## U

Useful Load, inside front cover

## V

Vacuum System Air Filter, 5-11  
Vacuum System Oil Separator, 5-10

## W

Weight,  
    empty, inside front cover  
    gross, inside front cover  
Weight and Balance, 4-4  
    loading graph, 4-6  
    moment envelope, 4-7  
    sample loading problem, 4-5

Wheel Bearings, Main, 5-11	operating check list, 7-14
Wheel, Rudder Trim Control, 1-8	operating notes, 7-15
Windshield and Windows, 5-2	Wing Loading, inside front cover
Wing Flap Switch, 1-8	Wing Tanks, 2-2, 7-1
Wing Leveler, 7-14	Winterization Kit, 7-1
emergency procedures, 7-15	





# WARRANTY

The Cessna Aircraft Company ("Cessna") warrants each new aircraft manufactured by it and such new aircraft equipment, accessories and service parts as are sold through its Commercial Aircraft Marketing Division to be free from defects in material and workmanship under normal use and service for a period of six (6) months after delivery to the original retail purchaser or first user in the case of aircraft, aircraft equipment and accessories (except Cessna-Crafted Avionics as herein defined) and service parts therefor, and for a period of one (1) year after such delivery in the case of Cessna-Crafted Avionics (which term includes all communication, navigation and autopilot systems bearing the name "Cessna", beginning at the connection to the aircraft electrical system (bus bar) and including "black boxes", antennas, microphones, speakers and other components and associated wiring but excluding gyro instruments used in connection with autopilot and navigation systems) and service parts therefor.

Cessna's obligation under this warranty is limited to repairing or replacing, at its option, any part or parts which, within the applicable six (6) or twelve (12) months period as above set forth, shall be returned transportation charges prepaid to Cessna at Wichita, Kansas, or to any Cessna appointed or Cessna Distributor appointed dealer authorized by such appointment to sell the aircraft, equipment, accessories and service parts of the type involved and which upon examination shall disclose to Cessna's satisfaction to have been thus defective. (A new warranty period is not established for replacements. Replacements are warranted for the remainder of the applicable six (6) or twelve (12) months original warranty period.) The repair or replacement of defective parts under this warranty will be made by Cessna or the dealer without charge for parts, or labor for removal, installation and/or actual repair of such defective parts, except import duties, sales or use taxes, if any, on replacements. (Locations of such dealers will be furnished by Cessna on request.)

The provisions of this warranty do not apply to any aircraft, equipment, accessories (including Cessna-Crafted Avionics) or service parts therefor manufactured or sold by Cessna which have been subject to misuse, negligence or accident, or which shall have been repaired or altered outside of Cessna's factory in any way so as in the judgment of Cessna to affect adversely its performance, stability or reliability, nor to normal maintenance services (such as engine tune-up, cleaning, control rigging, brake and other mechanical adjustments and maintenance inspections) and the replacement of service items (such as spark plugs, brake linings, filters, hoses, belts and tires) made in connection with such services or required as maintenance, nor to normal deterioration of soft trim and appearance items (such as paint, upholstery and rubber-like items) due to wear and exposure.

THIS WARRANTY IS EXPRESSLY IN LIEU OF ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED IN FACT OR BY LAW, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND OF ANY OTHER OBLIGATION OR LIABILITY ON THE PART OF CESSNA TO ANYONE OF ANY NATURE WHATSOEVER BY REASON OF THE MANUFACTURE, SALE, LEASE OR USE OF SUCH AIRCRAFT PRODUCTS, INCLUDING LIABILITY FOR CONSEQUENTIAL, SPECIAL OR INCIDENTAL DAMAGES, AND CESSNA NEITHER ASSUMES NOR AUTHORIZES ANYONE TO ASSUME FOR IT ANY OTHER OBLIGATION OR LIABILITY IN CONNECTION WITH SUCH AIRCRAFT PRODUCTS.

# SERVICING REQUIREMENTS

---

## FUEL:

AVIATION GRADE -- 80/87 MINIMUM GRADE  
CAPACITY EACH STANDARD TANK -- 32.5 GALLONS  
CAPACITY EACH LONG RANGE TANK -- 42.0 GALLONS  
(TO ENSURE MAXIMUM FUEL CAPACITY DURING REFUELING,  
PLACE THE FUEL SELECTOR VALVE HANDLE IN EITHER  
"LEFT" OR "RIGHT" POSITION TO PREVENT CROSSFEEDING.)

## ENGINE OIL:

AVIATION GRADE -- SAE 50 ABOVE 40°F.  
SAE 10W30 OR SAE 30 BELOW 40°F.  
(MULTI-VISCOSITY OIL WITH A RANGE OF SAE 10W30  
IS RECOMMENDED FOR IMPROVED STARTING IN COLD  
WEATHER. DETERGENT OR DISPERSANT OIL, CON-  
FORMING TO CONTINENTAL MOTORS SPECIFICATION  
MHS-24A, MUST BE USED.)  
CAPACITY OF ENGINE SUMP -- 12 QUARTS  
(DO NOT OPERATE ON LESS THAN 9 QUARTS. TO  
MINIMIZE LOSS OF OIL THROUGH BREATHER, FILL  
TO 10 QUART LEVEL FOR NORMAL FLIGHTS OF LESS  
THAN 3 HOURS. FOR EXTENDED FLIGHT, FILL TO  
12 QUARTS. IF OPTIONAL OIL FILTER IS INSTALLED,  
ONE ADDITIONAL QUART IS REQUIRED WHEN THE  
FILTER ELEMENT IS CHANGED.)

## HYDRAULIC FLUID:

MIL-H-5606 HYDRAULIC FLUID

## OXYGEN:

AVIATOR'S BREATHING OXYGEN -- SPEC. NO. MIL-O-27210  
MAXIMUM PRESSURE -- 1800 PSI AT 70°F.  
(CYLINDER TEMPERATURE STABILIZED AFTER FILLING)  
REFER TO PAGE 7-11 FOR FILLING PRESSURES.

## TIRE PRESSURE:

MAIN WHEELS -- 32 PSI ON 6.00 x 6, 6 PLY TIRES  
-- 25 TO 35 PSI ON 8.00 x 6, 6 PLY TIRES (OPT)  
NOSE WHEEL -- 50 PSI ON 5.00 x 5, 6 PLY TIRE  
-- 30 PSI ON 6.00 x 6, 4 PLY TIRE (OPT)

## NOSE GEAR SHOCK STRUT:

KEEP FILLED WITH HYDRAULIC FLUID AND INFLATED WITH  
AIR TO 55-60 PSI.

---

# CESSNA

"TAKE YOUR CESSNA HOME  
FOR SERVICE AT THE SIGN  
OF THE CESSNA SHIELD".



CESSNA AIRCRAFT COMPANY

WICHITA, KANSAS

